
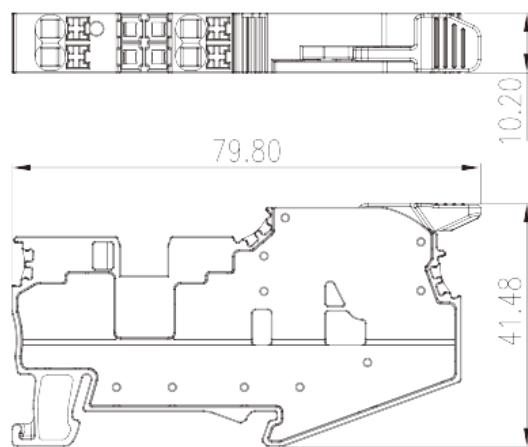


DPHD10-P001

DIN

>

:2026-02-09

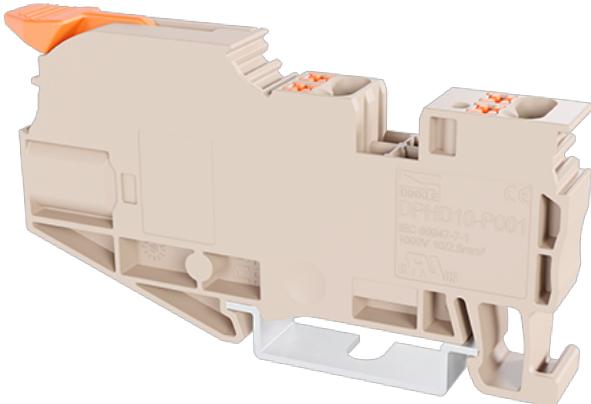

600V, 60A, Beige (default)

	Potential collective Terminal Block, Push-in Design
	Potential collective Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	79.8
(mm)	41.5
(mm)	41.5/ 43 (TS-35N) / 50.5 (TS-35/15N)
	Single level
	5

	PA
	I
UL 94	V0
	500M at DC 500V

-IEC



Delight Through Connections

(V)		1000
(A)		57/24
(III/3)(V)		1000
(III/3)(KV)		8
(mm ²)		0.5/0.14
(mm ²)		10/4
(mm ²)		0.5/0.14
(mm ²)		10/2.5
(mm ²) , , ,		0.5/0.25
(mm ²) , , ,		10/2.5
(mm ²) , , ,		0.5/0.25
(mm ²) , , ,		10/2.5
2 (mm ²) , , ,		1.5/0.5
2 (mm ²) , , ,		4/0.5
Width)(mm)	(Blade thickness x	0.6X3.5/1X5.5
		12~14 9~10
		TS-35N、 TS-35/15N
		NO
		NO

-UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		60/20
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		60/20
UL/CUL	AWG	20/26
UL/CUL	AWG	6/12
UL/CUL	AWG	20/26
UL/CUL	AWG	6/12

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

