
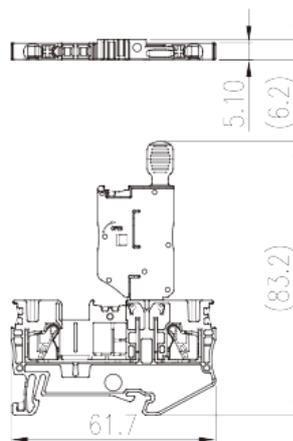


# DP2.5N-MLXX

DIN

>

:2026-05-14

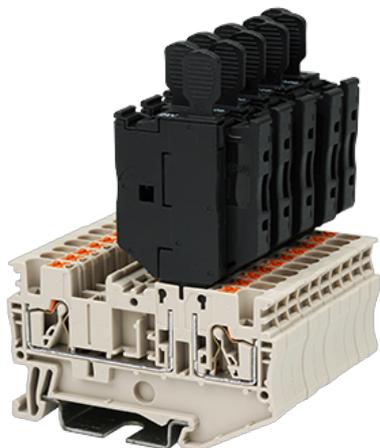

24V/60V/250V, 10A, Beige (default)

	Fuse Terminal Block, Push-in Design
	Fuse Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	61.7
(mm)	6.2
(mm)	83.2/ 84.7(TS-35N)/92.2(TS-35/15N)
( )	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)	24/60/250
(A)	6.3 (the Current is determined by the fuse used)
(III/3)(V)	24/60/250
(III/3)(KV)	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
Width)(mm) (Blade thickness x	0.6X3.5
	10
	TS-35N、TS-35/15N
	YES
	NO

**-UL**

(UL/CUL Group B)(V)	24/60/250
(UL/CUL Group B)(A)	10
(UL/CUL Group D)(V)	24/60/250
(UL/CUL Group D)(A)	10
UL/CUL AWG	26
UL/CUL AWG	12
UL/CUL AWG	26
UL/CUL AWG	12

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	26~12
(Group B)(V)	24/60/250
(Group B)(A)	10
(Group D)(AWG)	26~12
(Group D)(V)	24/60/250
(Group D)(A)	10

CUL

(Group B)(AWG)	26~12
(Group B)(V)	24/60/250
(Group B)(A)	10
(Group D)(AWG)	26~12
(Group D)(V)	24/60/250
(Group D)(A)	10

