


DP4N-T

DIN

>

:2026-05-14

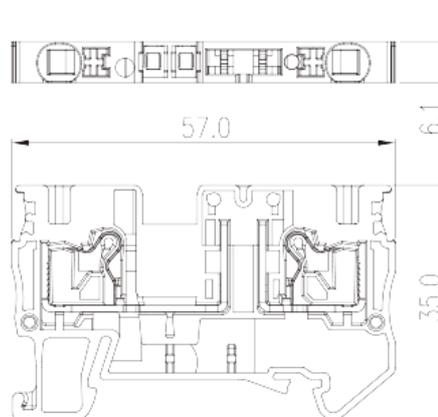

300V, 20A, Beige (default)

	Basic Disconnect Terminal Block, Push-in Design
	Disconnect Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	57
(mm)	6.1
(mm)	35/ 36.5(TS-35N),44(TS-35/15N)
()	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)	500
(A)	20
(III/3)(V)	500
(III/3)(KV)	6
(mm ²)	0.2
(mm ²)	6
(mm ²)	0.2
(mm ²)	4
(mm ²) , ,	0.25
(mm ²) , ,	4
(mm ²) , ,	0.25
(mm ²) , ,	4
² (mm ²) , ,	0.5
² (mm ²) , ,	1
Width)(mm) (Blade thickness x	0.8X4
	12
	TS-35N、TS-35/15N
	YES
	NO

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	20
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	20
UL/CUL AWG	24
UL/CUL AWG	10
UL/CUL AWG	24
UL/CUL AWG	10

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	24~10
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	24~10
(Group C)(V)	300
(Group C)(A)	20

CUL

(Group B)(AWG)	24~10
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	24~10
(Group C)(V)	300
(Group C)(A)	20

