


DP4N-MLXX

DIN

>

:2026-07-05

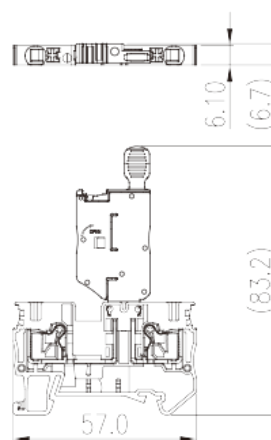

24V/60V/250V, 10A, Beige (default)

	Fuse Terminal Block, Push-in Design
	Fuse Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	57
(mm)	6.7
(mm)	83.2/ 84.7(TS-35N)/92.2(TS-35/15N)
()	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)	24/60/250
(A)	6.3 (the Current is determined by the fuse used)
(III/3)(V)	24/60/250
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	6
(mm ²)	0.2
(mm ²)	4
(mm ²) , ,	0.25
(mm ²) , ,	4
(mm ²) , ,	0.25
(mm ²) , ,	4
² (mm ²) , ,	0.5
² (mm ²) , ,	1
Width)(mm) (Blade thickness x	0.8X4
	12
	TS-35N、TS-35/15N
	YES
	NO

-UL

(UL/CUL Group B)(V)	24/60/250
(UL/CUL Group B)(A)	10
UL/CUL AWG	24
UL/CUL AWG	10
UL/CUL AWG	24
UL/CUL AWG	10

&

(YES or NO)	YES
-------------	-----

가 (YES or NO)	YES
	120
	-40

