
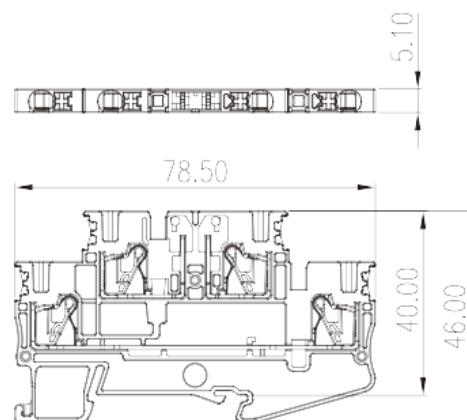


# DPP2.5N-T

DIN

&gt;

:2026-02-10

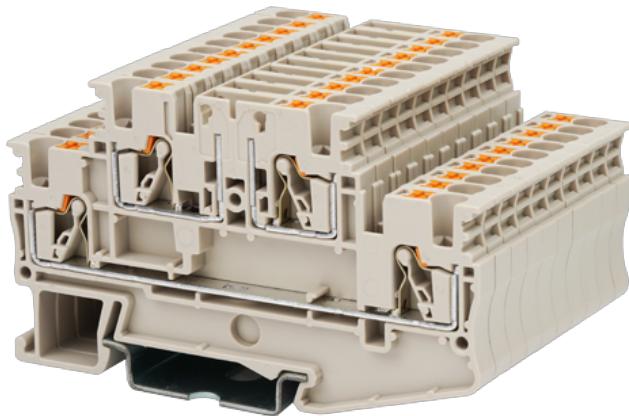

300V, 18A/20A, Beige (default)

	Bi-level Disconnect Terminal Block, Push-in Design
	Bi-level Disconnect Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	78.5
(mm)	5.1
(mm)	46/ 47.5 (TS-35N), 55(TS-35/15N)
	Double level
	4

UL 94	PA I V0 500M at DC 500V
-------	----------------------------------

-IEC



Delight Through Connections

(V)		400
(A)		20
(III/3)(V)		400
(III/3)(KV)		6
(mm <sup>2</sup> )		0.14
(mm <sup>2</sup> )		4
(mm <sup>2</sup> )		0.14
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> ) , , ,		0.25
(mm <sup>2</sup> ) , , ,		2.5
(mm <sup>2</sup> ) , , ,		0.25
(mm <sup>2</sup> ) , , ,		2.5
2 (mm <sup>2</sup> ) , , ,		0.5
2 (mm <sup>2</sup> ) , , ,		0.5
Width)(mm)	(Blade thickness x	0.6X3.5
		10
		TS-35N、TS-35/15N
		YES
		NO

### -UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		18/20
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		18/20
UL/CUL	AWG	26
UL/CUL	AWG	12
UL/CUL	AWG	26
UL/CUL	AWG	12

&amp;



(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

**UL**

(Group B)(AWG)	26~12
(Group B)(V)	300
(Group B)(A)	18/20
(Group C)(AWG)	26~12
(Group C)(V)	300
(Group C)(A)	18/20

**CUL**

(Group B)(AWG)	26~12
(Group B)(V)	300
(Group B)(A)	18/20
(Group C)(AWG)	26~12
(Group C)(V)	300
(Group C)(A)	18/20

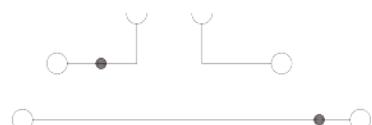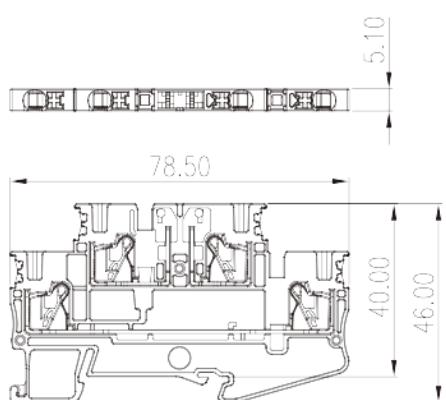



Delight Through Connections

