
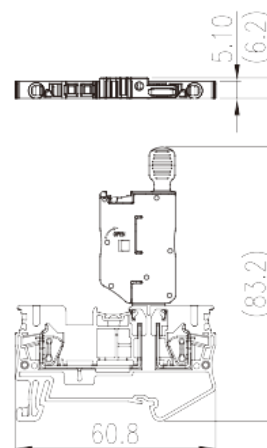


AK2.5-M

DIN

>

:2026-07-04

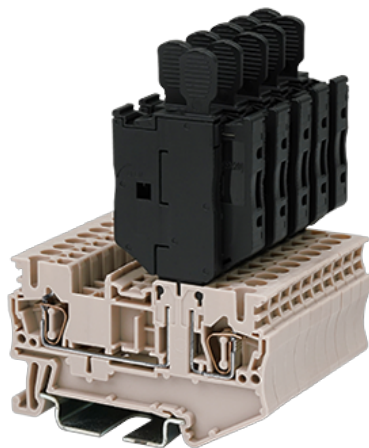

300V, 10A, Beige (default)

	Fuse Terminal Block, Spring Clamp Connection
	Fuse Terminal Block
	Beige (default)
	Spring Clamp Connection
	Rail Mounting
(mm)	60.8
(mm)	5.1
(mm)	83.2
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC



(V)	400
(A)	6.3
(III/3)(V)	400
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	2.5
(mm ²)	0.2
(mm ²)	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
² (mm ²) , ,	0.5
² (mm ²) , ,	1
Width)(mm) (Blade thickness x	0.6x3.5
	10
	TS-35
	YES
	NO

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	10
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	10
UL/CUL AWG	30
UL/CUL AWG	12
UL/CUL AWG	30
UL/CUL AWG	12

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

