
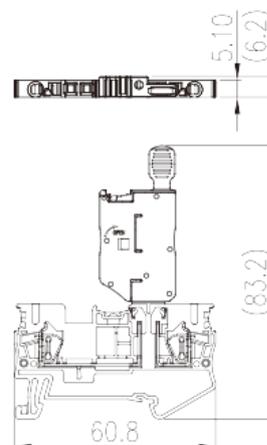


AK2.5-M

DIN

>

:2026-05-14

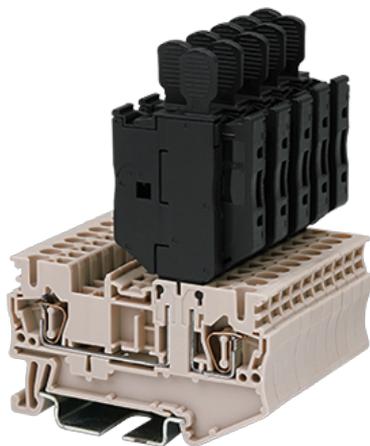

300V, 10A, Beige (default)

	Fuse Terminal Block, Spring Clamp Connection
	Fuse Terminal Block
	Beige (default)
	Spring Clamp Connection
	Rail Mounting
(mm)	60.8
(mm)	5.1
(mm)	83.2
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)		400
(A)		6.3
(III/3)(V)		400
(II/2)(KV)		4
(III/2)(KV)		4
(III/3)(KV)		4
(mm ²)		0.2
(mm ²)		2.5
(mm ²)		0.2
(mm ²)		2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
	² (mm ²) ,	0.5
	² (mm ²) ,	1
Width)(mm)	(Blade thickness x	0.6x3.5
		10
		TS-35
		YES
		NO

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		10
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		10
UL/CUL	AWG	30
UL/CUL	AWG	12
UL/CUL	AWG	30
UL/CUL	AWG	12

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

