
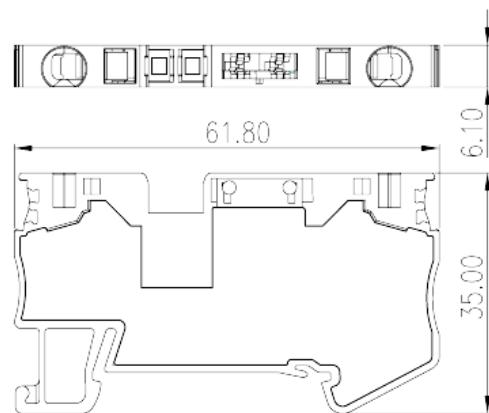


AK4-T

DIN

>

:2026-02-10

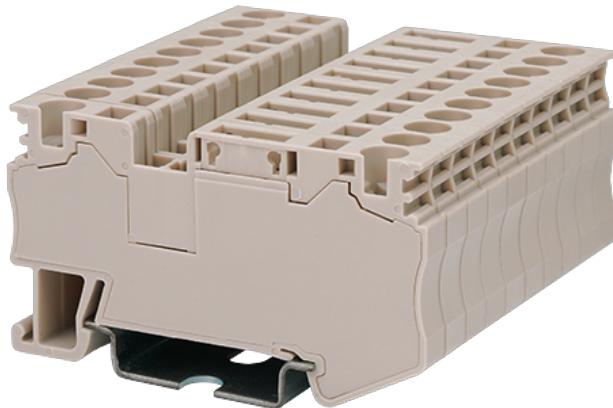

300V, 20A, Beige (default)

	Disconnect Terminal Block, Spring Clamp Connection
	Disconnect Terminal Block
(mm)	Beige (default)
(mm)	Spring Clamp Connection
(mm)	61.8
	6.1
	35 36.5 (TS-35N) / 44 (TS-35/15N)
	Single level
	2

	PA
	I
UL 94	V0
	500M at DC 500V

-IEC



Delight Through Connections

(V)		400
(A)		30
(III/3)(V)		400
(III/3)(KV)		6
(mm ²)		0.2
(mm ²)		4
(mm ²)		0.2
(mm ²)		4
(mm ²) , ,		0.25
(mm ²) , ,		4
(mm ²) , ,		0.25
(mm ²) , ,		4
² (mm ²) , ,		0.5
² (mm ²) , ,		2.5
Width)(mm) (Blade thickness x		0.6x3.5
		10~11
		TS-35N、TS-35/15N
		YES
		NO

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		20
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	28
UL/CUL	AWG	10
UL/CUL	AWG	28
UL/CUL	AWG	10

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	28~10
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	28~10
(Group C)(V)	300
(Group C)(A)	20
(Group D)(AWG)	28~10
(Group D)(V)	600
(Group D)(A)	5

CUL


(Group B)(AWG)	28~10
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	28~10
(Group C)(V)	300
(Group C)(A)	20
(Group D)(AWG)	28~10
(Group D)(V)	600
(Group D)(A)	5

VDE

(mm ²)	0.2~4
(V)	400
(A)	30



Delight Through Connections

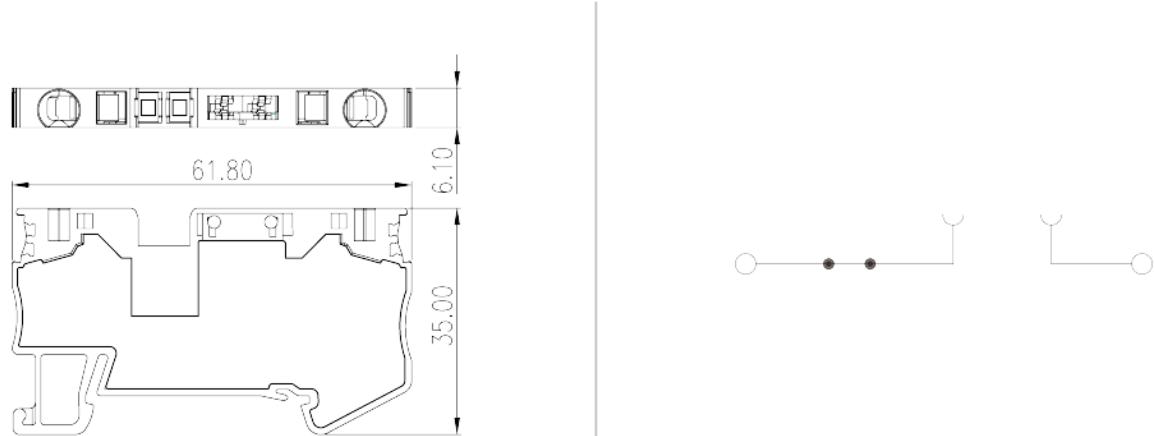

: +886-2-8069-9000 /

: service@dinkle.com

© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED