
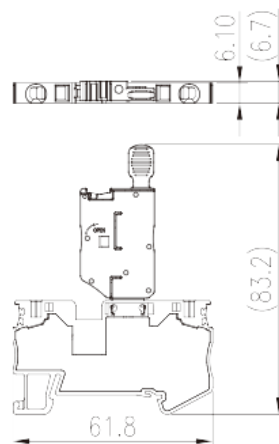


AK4-MLXX

DIN

>

:2026-07-04

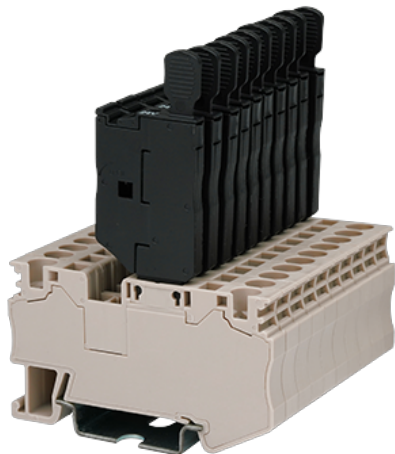

300V, 10A, Beige (default)

| | |
|-------|---|
| | Fuse Terminal Block, Push-in Design |
| | Fuse Terminal Block |
| | Beige (default) |
| | Spring Clamp Connection |
| (mm) | 61.8 |
| (mm) | 6.7 |
| (mm) | 83.2 84.7 (TS-35N) / 92.2 (TS-35/15N) |
| | Single level |
| | 2 |
| | PA |
| | I |
| UL 94 | V0 |
| | 500M at DC 500V |
| | -IEC |
| (V) | 400 |

| | | |
|--------------------|-----------------------------------|------------------|
| (A) | | 6.3 |
| (III/3)(V) | | 400 |
| (III/3)(KV) | | 6 |
| (mm ²) | | 0.2 |
| (mm ²) | | 4 |
| (mm ²) | | 0.2 |
| (mm ²) | | 4 |
| (mm ²) | , | 0.25 |
| (mm ²) | , | 4 |
| (mm ²) | , | 0.25 |
| (mm ²) | , | 4 |
| | ² (mm ²) , | 0.5 |
| | ² (mm ²) , | 2.5 |
| Width)(mm) | (Blade thickness x | 0.6x3.5 |
| | | 10~11 |
| | | TS-35N、TS-35/15N |
| | | YES |
| | | NO |

-UL

| | | |
|---------------------|-----|-----|
| (UL/CUL Group B)(V) | | 300 |
| (UL/CUL Group B)(A) | | 10 |
| UL/CUL | AWG | 28 |
| UL/CUL | AWG | 10 |
| UL/CUL | AWG | 28 |
| UL/CUL | AWG | 10 |

&

| | | |
|---------------|--|-----|
| (YES or NO) | | YES |
| 가 (YES or NO) | | YES |
| | | 120 |

