
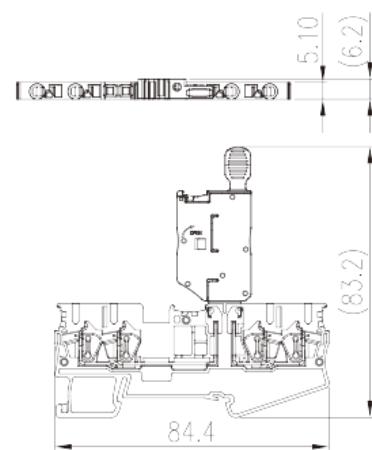


# AK2.5-TR-M

DIN

&gt;

:2026-02-09

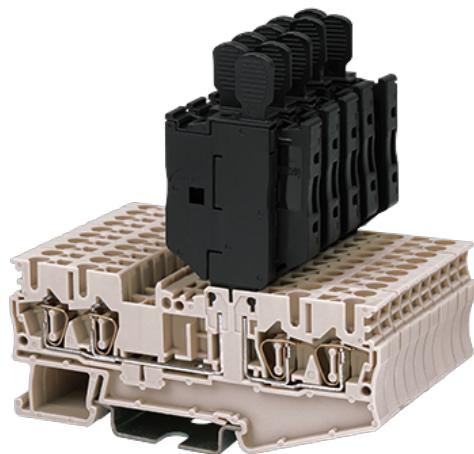

300V, 10A, Beige (default)

	Fuse Terminal Block, Push-in Design
	Fuse Terminal Block
	Beige (default)
	Spring Clamp Connection
(mm)	84.4
(mm)	5.1
(mm)	83.2 84.7 ( TS-35N ) / 92.2 ( TS-35/15N )
	Single level
	2

	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)	400
-----	-----

(A)		6.3
(III/3)(V)		400
(III/3)(KV)		4
(mm <sup>2</sup> )		0.2
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> )		0.2
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> ) , , ,		0.25
(mm <sup>2</sup> ) , , ,		2.5
(mm <sup>2</sup> ) , , ,		0.25
(mm <sup>2</sup> ) , , ,		2.5
<sup>2</sup> (mm <sup>2</sup> ) , , ,		0.5
<sup>2</sup> (mm <sup>2</sup> ) , , ,		1
Width)(mm)	(Blade thickness x	0.6x3.5
		10~11
		TS-35N、TS-35/15N
		YES
		NO

### -UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		10
UL/CUL	AWG	28
UL/CUL	AWG	12
UL/CUL	AWG	28
UL/CUL	AWG	12

### &

(YES or NO)		YES
가 (YES or NO)		YES
		120

