
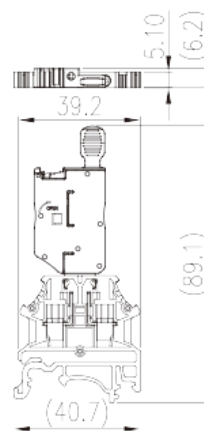


DK2.5N-M

DIN

>

:2026-07-05

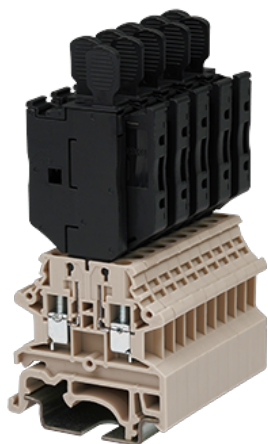

300V, 10A, Beige (default)

	Fuse Terminal Block, Screw Connection
	Fuse Terminal Block
	Beige (default)
	Screw Connection
	Rail Mounting
(mm)	40.7
(mm)	5.1
(mm)	89.1
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC



(V)		400
(A)		6.3
(III/3)(V)		400
(III/3)(KV)		4
(mm ²)		0.34
(mm ²)		4
(mm ²)		0.34
(mm ²)		2.5
(mm ²)	,	0.5
(mm ²)	,	2.5
(mm ²)	,	0.5
(mm ²)	,	2.5
2	(mm ²)	0.34
2	(mm ²)	1.5
2	(mm ²)	0.5
2	(mm ²)	1.5
(mm ²)	2 ,	0.5
(mm ²)	2 ,	1.5
(mm ²)	2 (mm ²) ,	0.5
(mm ²)	2 (mm ²) ,	1.5
		M2.5
Width)(mm)	(Blade thickness x	0.6x3.5
(N.m)		0.4
(N.m)		0.4
(N.m)		0.5
		9~11
		TS-35N、 TS-35/15N
		YES
		NO

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		10
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		10
UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12

&

(YES or NO)		YES
가 (YES or NO)		YES
		120
		-40

