
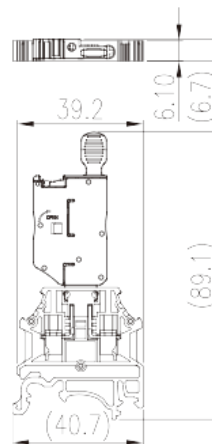


# DK4N-M

DIN

>

:2026-07-05

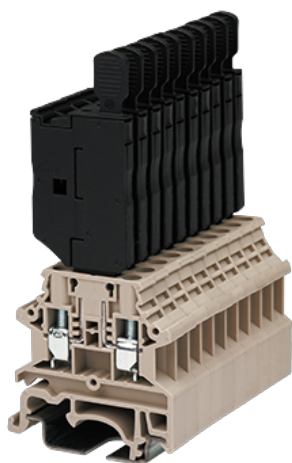

300V, 10A, Beige (default)

|       |                                     |
|-------|-------------------------------------|
|       | Fuse Terminal Block, Push-in Design |
|       | Fuse Terminal Block                 |
|       | Beige (default)                     |
|       | Screw Connection                    |
|       | Rail Mounting                       |
| (mm)  | 40.7                                |
| (mm)  | 6.7                                 |
| (mm)  | 89.1                                |
|       | Single level                        |
|       | 2                                   |
|       | PA                                  |
|       | I                                   |
| UL 94 | V0                                  |
|       | 500M at DC 500V                     |

-IEC



|                     |                    |                   |
|---------------------|--------------------|-------------------|
| (V)                 |                    | 400               |
| (III/3)(KV)         |                    | 4                 |
| (mm <sup>2</sup> )  |                    | 0.34              |
| (mm <sup>2</sup> )  |                    | 6                 |
| (mm <sup>2</sup> )  |                    | 0.34              |
| (mm <sup>2</sup> )  |                    | 4                 |
| (mm <sup>2</sup> )  | ,                  | 0.34              |
| (mm <sup>2</sup> )  | ,                  | 4                 |
| (mm <sup>2</sup> )  | ,                  | 0.34              |
| (mm <sup>2</sup> )  | ,                  | 4                 |
| 2                   | (mm <sup>2</sup> ) | 0.34              |
| 2                   | (mm <sup>2</sup> ) | 2.5               |
| 2                   | (mm <sup>2</sup> ) | 0.34              |
| 2                   | (mm <sup>2</sup> ) | 2.5               |
| (mm <sup>2</sup> )  | 2 ,                | 0.34              |
| (mm <sup>2</sup> )  | 2 ,                | 1.5               |
| (mm <sup>2</sup> )  | 2 ,                | 0.5               |
| (mm <sup>2</sup> )  | 2 ,                | 2.5               |
|                     |                    | M3                |
| Width)(mm)          | (Blade thickness x | 0.6x3.5           |
| (N.m)               |                    | 0.5               |
| (N.m)               |                    | 0.5               |
| (N.m)               |                    | 0.6               |
|                     |                    | 9~11              |
|                     |                    | TS-35N、 TS-35/15N |
|                     |                    | YES               |
|                     |                    | NO                |
| <b>-UL</b>          |                    |                   |
| (UL/CUL Group B)(V) |                    | 300               |

|                     |     |     |
|---------------------|-----|-----|
| (UL/CUL Group B)(A) |     | 10  |
| (UL/CUL Group C)(V) |     | 300 |
| (UL/CUL Group C)(A) |     | 10  |
| UL/CUL              | AWG | 22  |
| UL/CUL              | AWG | 10  |
| UL/CUL              | AWG | 22  |
| UL/CUL              | AWG | 10  |

&

|               |  |     |
|---------------|--|-----|
| (YES or NO)   |  | YES |
| 가 (YES or NO) |  | YES |
|               |  | 120 |
|               |  | -40 |

