
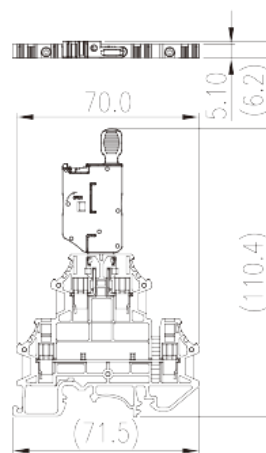


# DKK2.5N-M

DIN

>

:2026-05-14

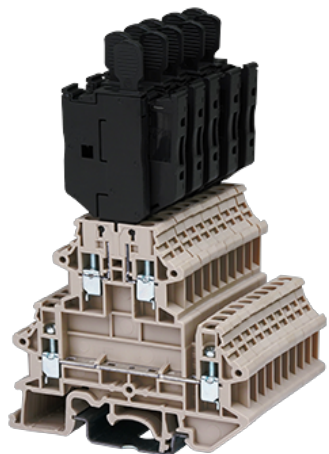

300V, 10A, Beige (default)

	Fuse Terminal Block, Screw Connection
	Fuse Terminal Block
	Beige (default)
	Screw Connection
	Rail Mounting
(mm)	71.5
(mm)	6.2
(mm)	110.4/111.4 ( TS-35N ) / 118.9 ( TS-35/15N )
	Double level
	4
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC




(V)	400
(A)	6.3 (the Current is determined by the fuse used)
(III/3)(V)	400
(III/3)(KV)	4
(mm <sup>2</sup> )	0.34
(mm <sup>2</sup> )	4
(mm <sup>2</sup> )	0.34
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.5
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.5
(mm <sup>2</sup> ) , ,	2.5
2 (mm <sup>2</sup> )	0.34
2 (mm <sup>2</sup> )	1.5
2 (mm <sup>2</sup> )	0.5
2 (mm <sup>2</sup> )	1.5
(mm <sup>2</sup> ) 2 , ,	0.5
(mm <sup>2</sup> ) 2 , ,	1.5
2 (mm <sup>2</sup> ) , ,	0.5
2 (mm <sup>2</sup> ) , ,	1.5
	M2.5
Width)(mm) (Blade thickness x	0.6x3.5
(N.m)	0.4
(N.m)	0.4
(N.m)	0.5
	9~11
	TS-35N、 TS-35/15N
	YES
	NO

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		10
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		10
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12

&

(YES or NO)		YES
가 (YES or NO)		YES
		120
		-40

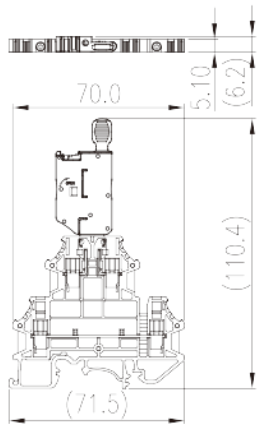



Delight Through Connections