
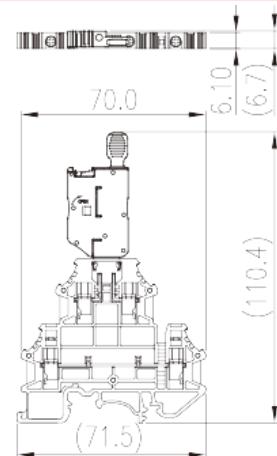


# DKK4N-MLXX

DIN

&gt;

:2026-02-10

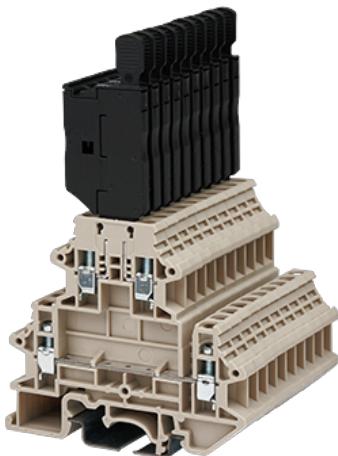

300V, 10A, Beige (default)

	Fuse Terminal Block, Push-in Design
	Fuse Terminal Block
	Beige (default)
	Screw Connection
	Rail Mounting
(mm)	40.7
(mm)	6.7
(mm)	110.4/111.4 ( TS-35N ) / 118.9 ( TS-35/15N )
	Double level
	4

UL 94	PA I V0 500M at DC 500V
-------	----------------------------------

-IEC

(V)		400
(A)		6.3 (the Current is determined by the fuse used)
(III/3)(V)		400
(III/3)(KV)		6.3 (the Current is determined by the fuse used)
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		6
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		4
(mm <sup>2</sup> ) , , ,		0.34
(mm <sup>2</sup> ) , , ,		4
(mm <sup>2</sup> ) , , ,		0.34
(mm <sup>2</sup> ) , , ,		4
2 (mm <sup>2</sup> )		0.34
2 (mm <sup>2</sup> )		2.5
2 (mm <sup>2</sup> )		0.34
2 (mm <sup>2</sup> )		2.5
2 (mm <sup>2</sup> ) , , ,		0.34
2 (mm <sup>2</sup> ) , , ,		1.5
2 (mm <sup>2</sup> ) , , ,		0.5
2 (mm <sup>2</sup> ) , , ,		2.5
		M3
Width)(mm)	(Blade thickness x	0.6x3.5
(N.m)		0.5
(N.m)		0.5
(N.m)		0.6
		9~11
		TS-35N、 TS-35/15N
		YES
		NO

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		10
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		10
UL/CUL	AWG	22
UL/CUL	AWG	10
UL/CUL	AWG	22
UL/CUL	AWG	10

&amp;

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

