
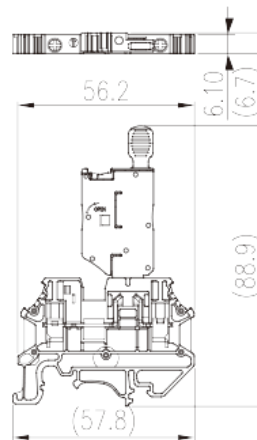


# DK4NS-MLXX

DIN

>

:2026-05-14

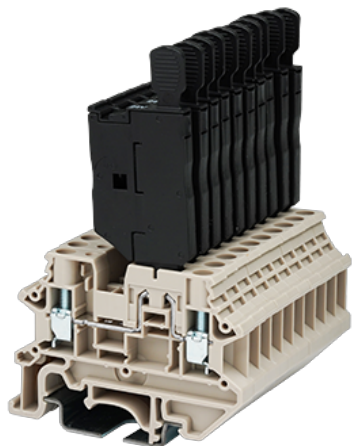

300V, 10A, Beige (default)

	Fuse Terminal Block, Push-in Design
	Fuse Terminal Block
	Beige (default)
	Screw Connection
	Rail Mounting
(mm)	57.8
(mm)	6.7
(mm)	88.9/90.1 (TS-35N)/97.6 (TS-35/15N)
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC



(V)	400
(A)	6.3 (the Current is determined by the fuse used)
(III/3)(V)	400
(III/3)(KV)	4
(mm <sup>2</sup> )	0.34
(mm <sup>2</sup> )	4
(mm <sup>2</sup> )	0.34
(mm <sup>2</sup> )	4
(mm <sup>2</sup> ) , ,	0.34
(mm <sup>2</sup> ) , ,	4
(mm <sup>2</sup> ) , ,	0.34
(mm <sup>2</sup> ) , ,	4
2 (mm <sup>2</sup> )	0.34
2 (mm <sup>2</sup> )	2.5
2 (mm <sup>2</sup> )	0.34
2 (mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) 2 , ,	0.34
(mm <sup>2</sup> ) 2 , ,	1.5
2 (mm <sup>2</sup> ) , ,	0.5
2 (mm <sup>2</sup> ) , ,	2.5
	M3
Width)(mm) (Blade thickness x	0.6x3.5
(N.m)	0.5
(N.m)	0.5
(N.m)	0.6
	9~11
	TS-35N、 TS-35/15N
	YES
	NO

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		10
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		10
UL/CUL	AWG	22
UL/CUL	AWG	10
UL/CUL	AWG	22
UL/CUL	AWG	10

&

(YES or NO)		YES
가 (YES or NO)		YES
		120
		-40

