


# 0177-03XX

PCB > PCB

:2026-05-14

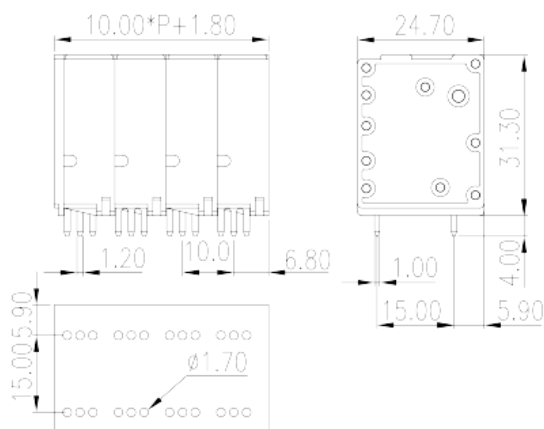

Pitch :10.00mm, 300V, 66A

		PCB Terminal Blocks, Push-in Design
		PCB Terminal Blocks
(mm)		10
		Black (default)
		Push-in Design
		Without
		Wave Soldering
(mm)		$10.00*(P-1)+11.8$
(mm)		31.3
(mm)		24.7
( ) x ( ) (mm)		1x 1.2
PCB (mm)		1.7
( )		02P~12P
		Single level
		2~12
		PA



	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

**-IEC**

(V)	320
(A)	76
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm <sup>2</sup> )	0.75
(mm <sup>2</sup> )	16
(mm <sup>2</sup> )	0.75
(mm <sup>2</sup> )	16
(mm <sup>2</sup> ) , ,	0.75
(mm <sup>2</sup> ) , ,	16
(mm <sup>2</sup> ) , ,	0.75
(mm <sup>2</sup> ) , ,	10
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.75
<sup>2</sup> (mm <sup>2</sup> ) , ,	4
Width)(mm) (Blade thickness x	0.8x4
	18~20

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	66



(UL/CUL Group C)(V)		150
(UL/CUL Group C)(A)		66
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	20
UL/CUL	AWG	4
UL/CUL	AWG	20
UL/CUL	AWG	4

&amp;

가	(YES or NO)	YES
		120
		-40

**UL**

(Group B)(AWG)		20~4
(Group B)(V)		300
(Group B)(A)		66
(Group C)(AWG)		20~4
(Group C)(V)		150
(Group C)(A)		66
(Group D)(AWG)		20~4
(Group D)(V)		300
(Group D)(A)		10

**CUL**

(Group B)(AWG)		20~4
(Group B)(V)		300
(Group B)(A)		66
(Group C)(AWG)		20~4
(Group C)(V)		150
(Group C)(A)		66
(Group D)(AWG)		20~4
(Group D)(V)		300
(Group D)(A)		10

