


# 0126-11XX

PCB > PCB -

:2026-03-30

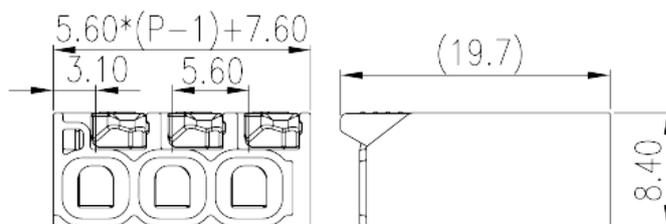

Pitch: 5.60 mm, 600V, 20A

	Single Level Feed-through Terminal Block, Push-in Design
	Single Level Feed-through Terminal Block
(mm)	5.60
	Refer to drawing
	Push-in Design
	Without
(mm)	$5.60 * (P-1) + 7.6$
(mm)	18.3
(mm)	8.4
( )	02P~06P
	Single level
	PC
	IIIa
UL 94	V2
	1000M at DC 500V



	COPPER ALLOY
	Tin PLATED

**-IEC**

(V)	450
(A)	32
(II/2)(V)	450
(II/2)(KV)	4
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	4
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	4
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) <sup>2</sup> , ,	0.5
(mm <sup>2</sup> ) <sup>2</sup> , ,	1.5
	12~14

**-UL**

(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	20
UL/CUL AWG	24
UL/CUL AWG	12

**&**

가 (YES or NO)	YES
	85
	-40

