


# 0126-11XX

PCB &gt; PCB -

:2026-02-10

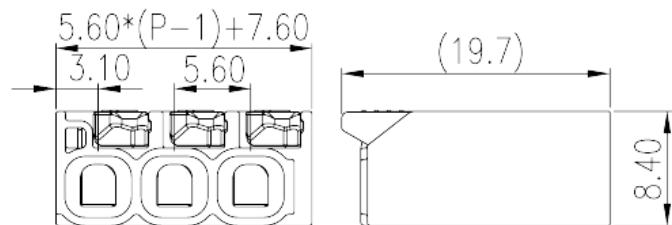

Pitch: 5.60 mm, 600V, 20A

	Single Level Feed-through Terminal Block, Push-in Design
	Single Level Feed-through Terminal Block
(mm)	5.60
	Refer to drawing
	Push-in Design
	Without
(mm)	5.60*(P-1)+7.6
(mm)	18.3
(mm)	8.4
( )	02P~05P
	Single level

	PC
	IIIa
UL 94	V2
	1000M at DC 500V

COPPER ALLOY

Tin PLATED

## -IEC

(V)		450
(A)		32
(II/2)(V)		450
(II/2)(KV)		4
(mm <sup>2</sup> )		0.14
(mm <sup>2</sup> )		4
(mm <sup>2</sup> )		0.14
(mm <sup>2</sup> )		4
(mm <sup>2</sup> ) , ,		0.25
(mm <sup>2</sup> ) , ,		2.5
(mm <sup>2</sup> ) , ,		0.25
(mm <sup>2</sup> ) , ,		2.5
(mm <sup>2</sup> ) <sup>2</sup> , ,		0.5
(mm <sup>2</sup> ) <sup>2</sup> , ,		1.5
		12~14

## -UL

(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		20
UL/CUL	AWG	24
UL/CUL	AWG	12

&amp;

†	(YES or NO)	YES
		85
		-40

