


0126-11XX

PCB > PCB -

:2026-07-06

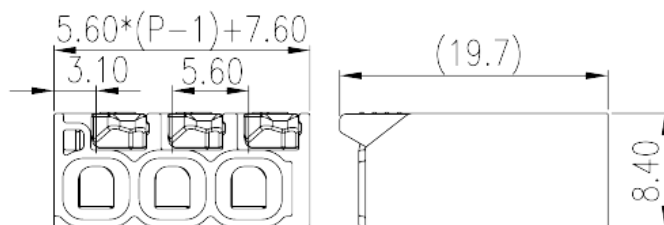

Pitch: 5.60 mm, 600V, 20A

	Single Level Feed-through Terminal Block, Push-in Design
	Single Level Feed-through Terminal Block
(mm)	5.60
	Refer to drawing
	Push-in Design
	Without
(mm)	$5.60 * (P-1) + 7.6$
(mm)	18.3
(mm)	8.4
()	02P~06P
	Single level
	PC
	IIIa
UL 94	V2
	1000M at DC 500V



	COPPER ALLOY
	Tin PLATED

-IEC

(V)	450
(A)	32
(II/2)(V)	450
(II/2)(KV)	4
(mm ²)	0.14
(mm ²)	4
(mm ²)	0.14
(mm ²)	4
(mm ²) , ,	0.25
(mm ²) , ,	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
(mm ²) ² , ,	0.5
(mm ²) ² , ,	1.5
	12~14

-UL

(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	20
UL/CUL AWG	24
UL/CUL AWG	12

&

가 (YES or NO)	YES
	85
	-40

