


ECSH381VM- XXPQK01

PCB > PCB -

:2026-04-02

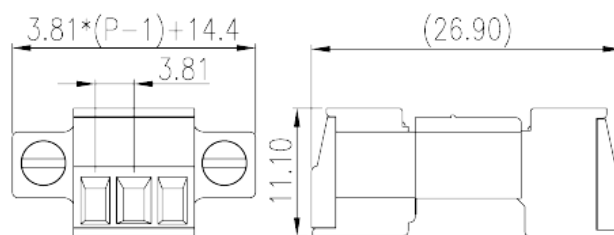

300V, 8A, Green (default)

	PCB Connector, Screw Connection
(mm)	3.5
	Green (default)
	Screw Connection
(mm)	$3.81 * (P-1) + 14.4$
(mm)	26.9
(mm)	11.1
()	02P~24P
	Single level
	2~24
	PA
	I
UL 94	V0
	500M at DC 500V



		COPPER ALLOY
		Tin PLATED
-IEC		
(V)		320
(A)		12
(II/2)(V)		320
(III/2)(V)		160
(III/3)(V)		160
(II/2)(KV)		2.5
(III/2)(KV)		2.5
(III/3)(KV)		2.5
(mm ²)		0.2
(mm ²)		1.5
(mm ²)		0.2
(mm ²)		1.5
(mm ²)	,	0.25
(mm ²)	,	1.5
(mm ²)	,	0.25
(mm ²)	,	0.5
2	(mm ²)	0.2
2	(mm ²)	0.75
2	(mm ²)	0.2
2	(mm ²)	0.75
(mm ²)	2 ,	0.25
(mm ²)	2 ,	0.34
(mm ²)	2 ,	0.5
(mm ²)	2 ,	0.5
		M2
Width)(mm)	(Blade thickness x	0.4x2.5

(N.m)	0.2
(N.m)	0.25
(N.m)	0.3
	6~7

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	8
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	8
UL/CUL AWG	30
UL/CUL AWG	14
UL/CUL AWG	30
UL/CUL AWG	14

&

가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	30~14
(Group B)(V)	300
(Group B)(A)	8
(Group D)(AWG)	30~14
(Group D)(V)	300
(Group D)(A)	8

CUL

(Group B)(AWG)	30~14
(Group B)(V)	300
(Group B)(A)	8
(Group D)(AWG)	30~14
(Group D)(V)	300
(Group D)(A)	8

