


2ESDHM- XXPQK01

PCB > PCB -

:2026-07-06

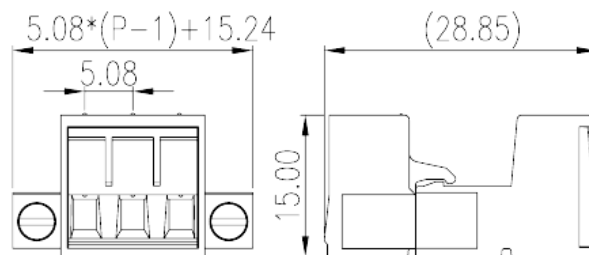

300V, 15A, Green (default)

	PCB Connector, Screw Connection
(mm)	5.08
	Green (default)
	Screw Connection
(mm)	$5.08 * (P - 1) + 15.24$
(mm)	28.85
(mm)	15
()	02P~12P
	Single level
	2~12
	PA
	I
UL 94	V0
	500M at DC 500V



		COPPER ALLOY
		Tin PLATED
-IEC		
(V)		630
(A)		18
(II/2)(V)		630
(III/2)(V)		320
(III/3)(V)		320
(II/2)(KV)		4
(III/2)(KV)		4
(III/3)(KV)		4
(mm ²)		0.2
(mm ²)		2.5
(mm ²)		0.2
(mm ²)		2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
2	(mm ²)	0.2
2	(mm ²)	1.5
2	(mm ²)	0.2
2	(mm ²)	1.5
(mm ²)	2 ,	0.25
(mm ²)	2 ,	1
(mm ²)	2 ,	0.5
(mm ²)	2 ,	1.5
		M2.5
Width)(mm)	(Blade thickness x	0.6x3.5



(N.m)	0.4
(N.m)	0.5
(N.m)	0.2
	7~8

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	24
UL/CUL AWG	12
UL/CUL AWG	24
UL/CUL AWG	12

&

가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	24~12
(Group B)(V)	300
(Group B)(A)	15
(Group D)(AWG)	24~12
(Group D)(V)	300
(Group D)(A)	10

CUL

(Group B)(AWG)	24~12
(Group B)(V)	300
(Group B)(A)	15
(Group D)(AWG)	24~12
(Group D)(V)	300
(Group D)(A)	10

