


0234-30XX-MW

PCB > PCB -

:2026-07-06

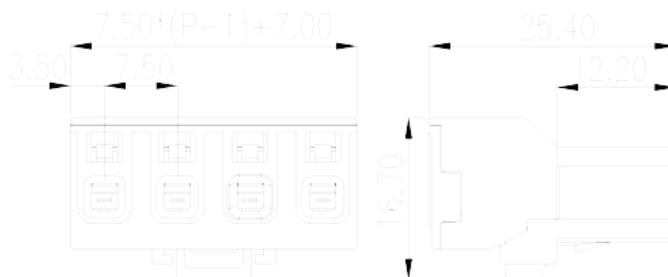

Pitch : 7.50mm, 300V, 16A

	PCB Connector, Push-in Design
	PCB Connector – Plug
(mm)	7.50
	Spring Clamp Connection
	With lock flange
(mm)	$7.50 * (P - 1) + 7$
(mm)	16.7
(mm)	25.4
()	02P~12P
	Single level
	PBT
	a
UL 94	V0
	1000M at DC 500V
	HIGH PERFORMANCE COPPER ALLOY
	Au PLATED

-IEC

(V)	1000
(A)	18
(II/2)(V)	1000
(III/2)(V)	630
(III/3)(V)	500
(II/2)(KV)	6
(III/2)(KV)	6
(III/3)(KV)	6
(mm ²)	0.2
(mm ²)	2.5
(mm ²)	0.2
(mm ²)	2.5
(mm ²) , ,	0.25
(mm ²) , ,	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1.5
2 (mm ²) , ,	0.5
2 (mm ²) , ,	1.5
Philips	0.4x2.5
	9~10

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	16
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	16
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	16
UL/CUL AWG	28
UL/CUL AWG	12



UL/CUL	AWG	28
UL/CUL	AWG	12

&

가	(YES or NO)	YES
		120
		-40

UL

(Group B)(AWG)		28~12
(Group B)(V)		300
(Group B)(A)		16
(Group C)(AWG)		28~12
(Group C)(V)		300
(Group C)(A)		16
(Group D)(AWG)		28~12
(Group D)(V)		300
(Group D)(A)		16

CUL

(Group B)(AWG)		28~12
(Group B)(V)		300
(Group B)(A)		16
(Group C)(AWG)		28~12
(Group C)(V)		300
(Group C)(A)		16
(Group D)(AWG)		28~12
(Group D)(V)		300
(Group D)(A)		16

--	--	--

