
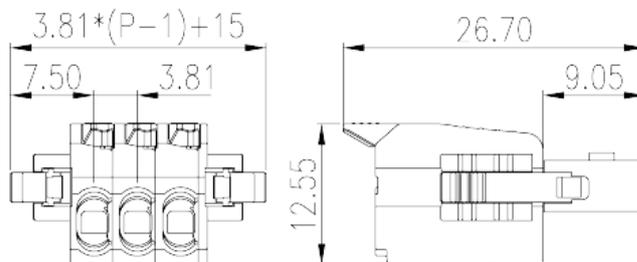


# 0256-63XX

PCB > PCB -

:2026-04-01

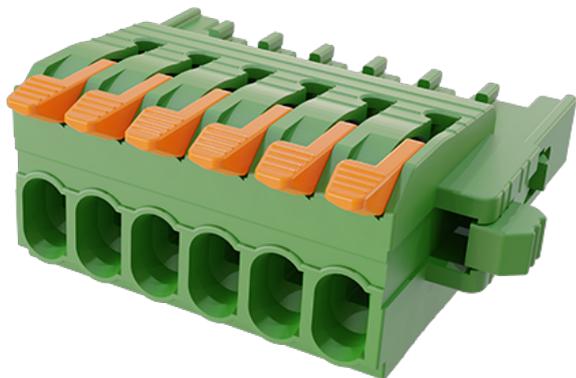

Pitch: 3.81mm, 300V, 8A

	PCB Connector, Push-in Design
	PCB Connector – Plug
(mm)	3.81
	Push-in Design
	With lock flange
(mm)	$3.81 * (P-1) + 15$
(mm)	26.7
(mm)	12.55
( )	02P~24P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

**-IEC**

(V)	320
(A)	10
(II/2)(V)	320
(III/2)(V)	160
(III/3)(V)	160
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5
2 (mm <sup>2</sup> )	0.5
2 (mm <sup>2</sup> )	0.75
	9~10

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	8
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	8
UL/CUL AWG	28
UL/CUL AWG	16
UL/CUL AWG	28
UL/CUL AWG	16

**&**

가 (YES or NO)	YES
	120
	-40

**UL**

(Group B)(AWG)	28~16
(Group B)(V)	300
(Group B)(A)	8
(Group D)(AWG)	28~16

(Group D)(V)	300
(Group D)(A)	8

CUL

(Group B)(AWG)	28~16
(Group B)(V)	300
(Group B)(A)	8
(Group D)(AWG)	28~16
(Group D)(V)	300
(Group D)(A)	8

