
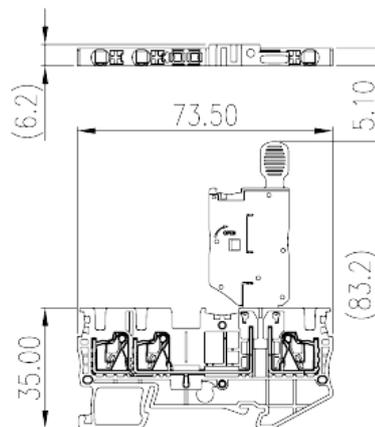


DP2.5N-TN-MLXX

DIN

>

:2026-05-14

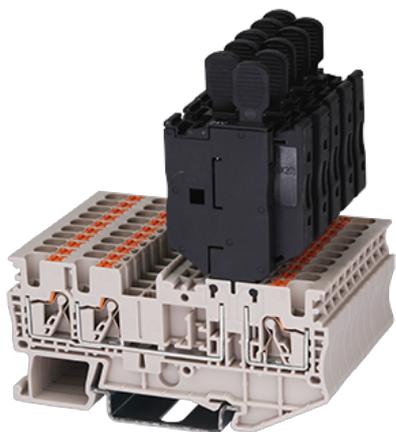

24V/60V/250V, 10A, Beige (default)

	Fuse Terminal Block, Push-in Design
	Fuse Terminal Block
	Refer to drawing
	Push-in Design
	Rail Mounting
(mm)	73.5
(mm)	6.2
(mm)	84.7 (TS-35N) / 92.2 (TS-35/15N)
()	1P
	Single level
	3
	PA
	I
UL 94	V0



500M at DC 500V

-IEC

(V)	24/60/250
(A)	6.3 (the Current is determined by the fuse used)
(III/3)(V)	24/60/250
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	4
(mm ²)	0.2
(mm ²)	2.5
(mm ²)	0.25
(mm ²)	2.5
(mm ²)	0.25
(mm ²)	2.5
² (mm ²)	0.5
² (mm ²)	0.5
Width)(mm) (Blade thickness x	0.6x3.5
	10
	TS-35N、TS-35/15N
	YES
	NO

-UL

(UL/CUL Group B)(V)	24/60/250
(UL/CUL Group B)(A)	10
UL/CUL AWG	26
UL/CUL AWG	12
UL/CUL AWG	26
UL/CUL AWG	12

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

