
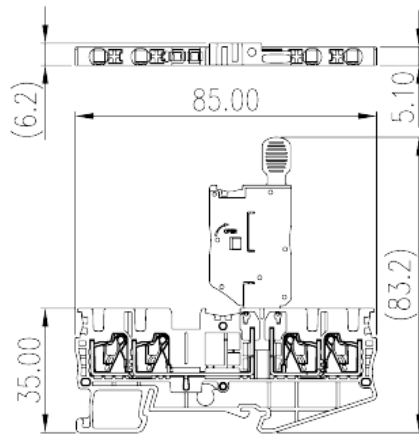


DP2.5N-TR-MLXX

DIN

>

:2026-07-05

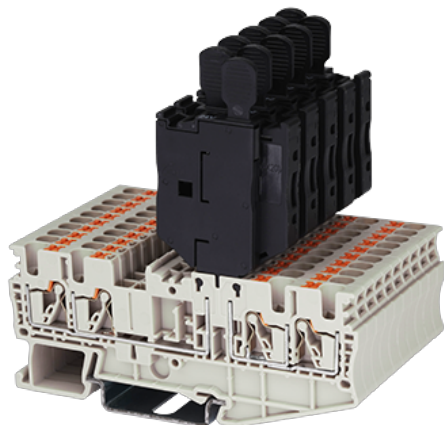

24V/60V/250V, 10A, Beige (default)

| | |
|-------|-------------------------------------|
| | Fuse Terminal Block, Push-in Design |
| | Fuse Terminal Block |
| | Refer to drawing |
| | Push-in Design |
| | Rail Mounting |
| (mm) | 85 |
| (mm) | 6.2 |
| (mm) | 84.7 (TS-35N) / 92.2(TS-35/15N) |
| () | 1P |
| | Single level |
| | 4 |
| | PA |
| | I |
| UL 94 | V0 |



500M at DC 500V

-IEC

| | |
|---------------------------------|--|
| (V) | 24/60/250 |
| (A) | 6.3 (the Current is determined by the fuse used) |
| (III/3)(V) | 24/60/250 |
| (III/3)(KV) | 4 |
| (mm ²) | 0.2 |
| (mm ²) | 4 |
| (mm ²) | 0.2 |
| (mm ²) | 2.5 |
| (mm ²) | 0.25 |
| (mm ²) | 2.5 |
| (mm ²) | 0.25 |
| (mm ²) | 2.5 |
| ² (mm ²) | 0.5 |
| ² (mm ²) | 0.5 |
| Width)(mm) (Blade thickness x | 0.6x3.5 |
| | 10 |
| | TS-35N、TS-35/15N |
| | YES |
| | NO |

-UL

| | |
|---------------------|-----------|
| (UL/CUL Group B)(V) | 24/60/250 |
| (UL/CUL Group B)(A) | 10 |
| UL/CUL AWG | 26 |
| UL/CUL AWG | 12 |
| UL/CUL AWG | 26 |
| UL/CUL AWG | 12 |

&

| | |
|---------------|-----|
| (YES or NO) | YES |
| 가 (YES or NO) | YES |
| | 120 |
| | -40 |

