
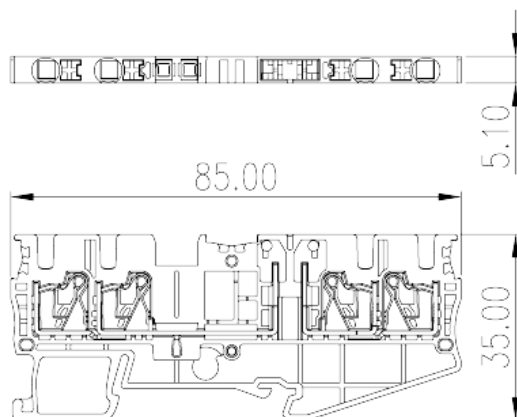


# DP2.5N-TR-T

DIN

>

:2026-07-05

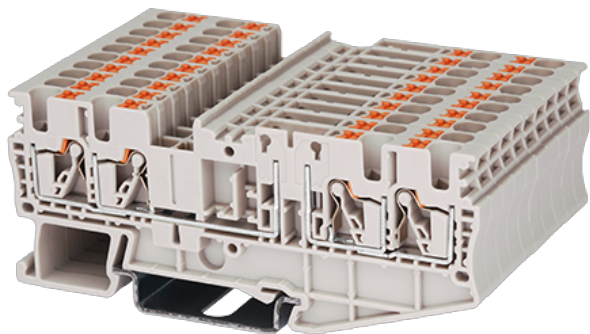

300V, 18A, Beige (default)

	Disconnect Terminal Block, Push-in Design
	Disconnect Terminal Block
	Refer to drawing
	Push-in Design
	Rail Mounting
(mm)	85
(mm)	5.1
(mm)	36.5 ( TS-35N ) / 44 ( TS-35/15N )
( )	1P
	Single level
	4
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)	400
(A)	20
(III/3)(V)	400
(III/3)(KV)	6
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
Width)(mm) (Blade thickness x	0.6x3.5
	10
	TS-35N、TS-35/15N
	YES
	NO

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	18
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	10
UL/CUL AWG	26
UL/CUL AWG	12
UL/CUL AWG	26
UL/CUL AWG	12



&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	26~12
(Group B)(V)	300
(Group B)(A)	18
(Group C)(AWG)	26~12
(Group C)(V)	300
(Group C)(A)	18
(Group D)(AWG)	26~12
(Group D)(V)	300
(Group D)(A)	10

CUL

(Group B)(AWG)	26~12
(Group B)(V)	300
(Group B)(A)	18
(Group C)(AWG)	26~12
(Group C)(V)	300
(Group C)(A)	18
(Group D)(AWG)	26~12
(Group D)(V)	300
(Group D)(A)	10

--	--

