
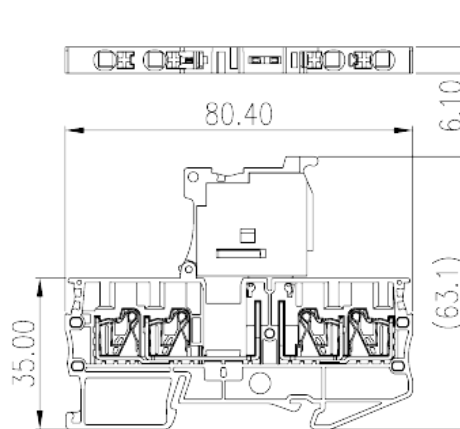


# DP2.5NU-TR-TFLXX

DIN

>

:2026-05-14

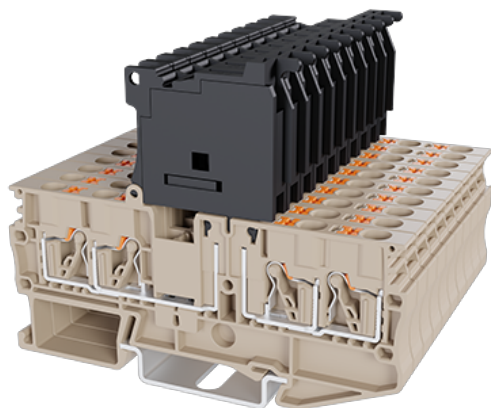

24V/60V/110V/250V, 12A, Beige (default)

|       |                                      |
|-------|--------------------------------------|
|       | Fuse Terminal Block, Push-in Design  |
|       | Fuse Terminal Block                  |
|       | Refer to drawing                     |
|       | Push-in Design                       |
|       | Rail Mounting                        |
| (mm)  | 80.4                                 |
| (mm)  | 6.1                                  |
| (mm)  | 64.6 ( TS-35N ) / 72.1 ( TS-35/15N ) |
| ( )   | 1P                                   |
|       | Single level                         |
|       | 4                                    |
|       | PA                                   |
|       | I                                    |
| UL 94 | V0                                   |



500M at DC 500V

**-IEC**

|                                 |                                                  |
|---------------------------------|--------------------------------------------------|
| (V)                             | 24/60/110/250                                    |
| (A)                             | 6.3 (the Current is determined by the fuse used) |
| (III/3)(V)                      | 24/60/110/250                                    |
| (III/3)(KV)                     | 4                                                |
| (mm <sup>2</sup> )              | 0.14                                             |
| (mm <sup>2</sup> )              | 4                                                |
| (mm <sup>2</sup> )              | 0.14                                             |
| (mm <sup>2</sup> )              | 2.5                                              |
| (mm <sup>2</sup> )              | 0.25                                             |
| (mm <sup>2</sup> )              | 2.5                                              |
| (mm <sup>2</sup> )              | 0.25                                             |
| (mm <sup>2</sup> )              | 2.5                                              |
| <sup>2</sup> (mm <sup>2</sup> ) | 0.5                                              |
| <sup>2</sup> (mm <sup>2</sup> ) | 0.5                                              |
| Width)(mm) (Blade thickness x   | 0.6x3.5                                          |
|                                 | 9~10                                             |
|                                 | TS-35N、TS-35/15N                                 |
|                                 | YES                                              |
|                                 | NO                                               |

**-UL**

|                     |               |
|---------------------|---------------|
| (UL/CUL Group B)(V) | 24/60/110/250 |
| (UL/CUL Group B)(A) | 12            |
| (UL/CUL Group C)(V) | 24/60/110/250 |
| (UL/CUL Group C)(A) | 12            |
| UL/CUL AWG          | 26            |
| UL/CUL AWG          | 12            |
| UL/CUL AWG          | 26            |

|               |     |     |
|---------------|-----|-----|
| UL/CUL        | AWG | 12  |
| <b>&amp;</b>  |     |     |
| (YES or NO)   |     | YES |
| 가 (YES or NO) |     | YES |
|               |     | 120 |
|               |     | -40 |

### UL

|                 |               |
|-----------------|---------------|
| (Group B) (AWG) | 26~12         |
| (Group B) (V)   | 24/60/110/250 |
| (Group B) (A)   | 12            |
| (Group C) (AWG) | 26~12         |
| (Group C) (V)   | 24/60/110/250 |
| (Group C) (A)   | 12            |

### CUL

|                 |               |
|-----------------|---------------|
| (Group B) (AWG) | 26~12         |
| (Group B) (V)   | 24/60/110/250 |
| (Group B) (A)   | 12            |
| (Group C) (AWG) | 26~12         |
| (Group C) (V)   | 24/60/110/250 |
| (Group C) (A)   | 12            |

