


# DP2.5PGA

DIN

>

:2025-05-02

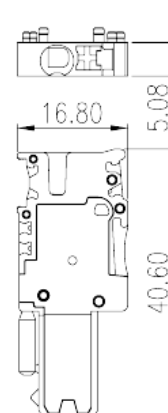

600V, 20A, Beige (default)

	Component Plug, Push-in Design
	Component Plug
	Refer to drawing
	Push-in Design
(mm)	16.8
(mm)	5.08
(mm)	40.6
( )	1
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

**-IEC**

(V)	800
(A)	24
(III/3)(V)	800
(III/3)(KV)	8
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	4
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
Width)(mm) (Blade thickness x	0.6x3.5
	10

**-UL**

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	20
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	20
UL/CUL AWG	26
UL/CUL AWG	12
UL/CUL AWG	26
UL/CUL AWG	12

**&**

(YES or NO)	YES
가 (YES or NO)	YES



	120
	-40

### UL

(Group B)(AWG)	26~12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	26~12
(Group C)(V)	600
(Group C)(A)	20

### CUL

(Group B)(AWG)	26~12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	26~12
(Group C)(V)	600
(Group C)(A)	20

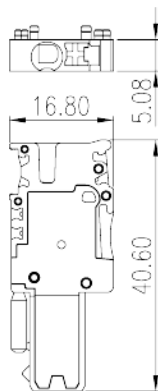



Delight Through Connections