
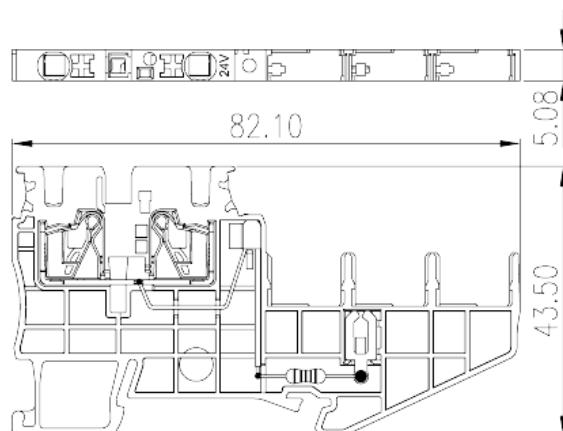


DP2.5SGR-L24

DIN

>

:2026-02-09

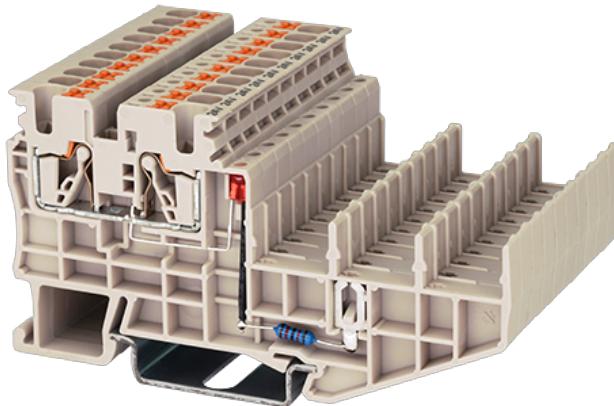

24V, 20A, Beige (default)

	Component terminal block, Push-in Design
	Component terminal block
	Refer to drawing
	Push-in Design
(mm)	82.1
(mm)	5.08
(mm)	45 (TS-35N) / 52.5 (TS-35/15N)
	Single level
	2

	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)		24
(A)		24
(III/3)(V)		24
(III/3)(KV)		4
(mm ²)		0.14
(mm ²)		4
(mm ²)		0.14
(mm ²)		2.5
(mm ²) , , ,		0.25
(mm ²) , , ,		2.5
(mm ²) , , ,		0.25
(mm ²) , , ,		2.5
2 (mm ²) , , ,		0.5
2 (mm ²) , , ,		0.5
Width)(mm)	(Blade thickness x	0.6x3.5
		8~10
		TS-35N、 TS-35/15N
		YES
		NO

-UL

(UL/CUL Group B)(V)		24
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		24
(UL/CUL Group C)(A)		20
UL/CUL	AWG	26
UL/CUL	AWG	12
UL/CUL	AWG	26
UL/CUL	AWG	12

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

