
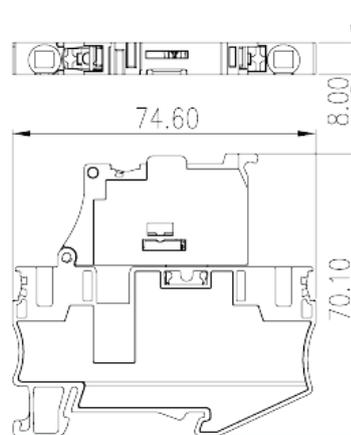


DP6N-TFS

DIN

>

:2026-03-30

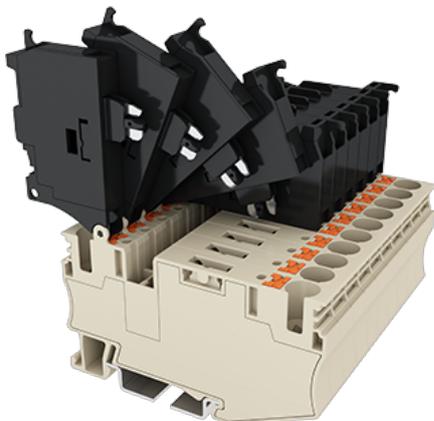

300V, 10A, Beige (default)

	Fuse Terminal Block, Push-in Design
	Fuse Terminal Block
	Refer to drawing
	Push-in Design
(mm)	74.6
(mm)	8
(mm)	71.6(TS-35N)/79.1(TS-35/15N)
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V
	HIGH PERFORMANCE COPPER ALLOY
	Tin PLATED

-IEC

(V)		300
(III/3)(V)		300
(III/3)(KV)		6
(mm ²)		0.5
(mm ²)		10
(mm ²)		0.5
(mm ²)		6
(mm ²)	,	0.5
(mm ²)	,	6
(mm ²)	,	0.5
(mm ²)	,	6
² (mm ²)	,	0.5
² (mm ²)	,	1.5
Width)(mm)	(Blade thickness x	0.8x4
		12
		TS-35N、TS-35/15N
		YES
		NO

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		10
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		10
UL/CUL	AWG	20
UL/CUL	AWG	8
UL/CUL	AWG	20
UL/CUL	AWG	8

&



(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	20~8
(Group B)(V)	300
(Group B)(A)	10
(Group C)(AWG)	20~8
(Group C)(V)	300
(Group C)(A)	10
(Group D)(AWG)	20~8
(Group D)(V)	600
(Group D)(A)	5

CUL

(Group B)(AWG)	20~8
(Group B)(V)	300
(Group B)(A)	10
(Group C)(AWG)	20~8
(Group C)(V)	300
(Group C)(A)	10
(Group D)(AWG)	20~8
(Group D)(V)	600
(Group D)(A)	5

--	--

