
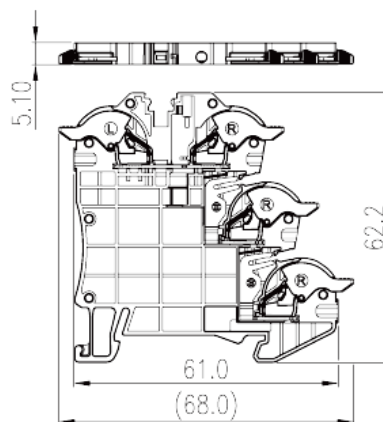


DPH1.5SGU

DIN

>

:2026-07-05

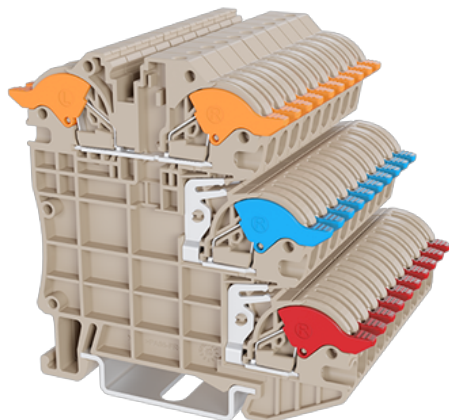

300V, 14A, Beige (default)

	Sensor Terminal Block, Screw Connection
	Sensor Terminal Block
	Refer to drawing
	Push-in Design
(mm)	68
(mm)	5.1
(mm)	63.5 (TS-35N) / 71 (TS-35/15N)
()	3P
	Three level
	4
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC



(V)	250
(A)	15
(III/3)(V)	250
(III/3)(KV)	4
(mm ²)	0.14
(mm ²)	1.5
(mm ²)	0.14
(mm ²)	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1.5
(mm ²) , ,	0.25
(mm ²) , ,	0.75
Width)(mm) (Blade thickness x	0.4x2.5
	8
	TS-35N、TS-35/15N
	YES
	NO

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	14
(UL/CUL Group C)(V)	150
(UL/CUL Group C)(A)	14
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	26
UL/CUL AWG	14
UL/CUL AWG	26
UL/CUL AWG	14

&

(YES or NO)	YES
-------------	-----



가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	26~14
(Group B)(V)	300
(Group B)(A)	14
(Group C)(AWG)	26~14
(Group C)(V)	150
(Group C)(A)	14
(Group D)(AWG)	26~14
(Group D)(V)	300
(Group D)(A)	10

CUL

(Group B)(AWG)	26~14
(Group B)(V)	300
(Group B)(A)	14
(Group C)(AWG)	26~14
(Group C)(V)	150
(Group C)(A)	14
(Group D)(AWG)	26~14
(Group D)(V)	300
(Group D)(A)	10

--	--

