
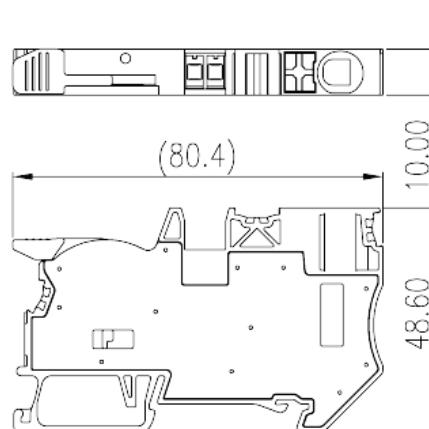


DPH10-DP

DIN

>

:2026-02-09

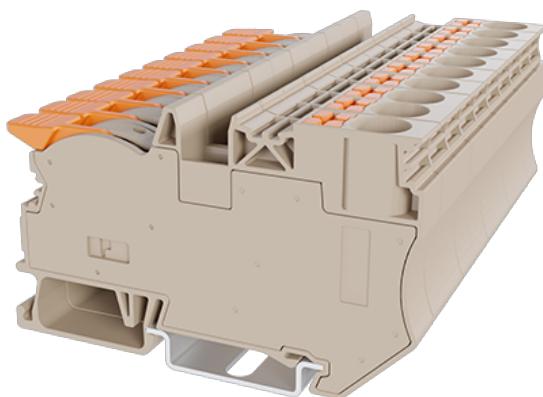

600V, 55A, Beige (default)

	Single Level Feed-through Terminal Block, Push-in Design
	Single Level Feed-through Terminal Block
	Refer to drawing
	Push-in Design
(mm)	80.4
(mm)	10
(mm)	50.1 (TS-35N) / 57.6 (TS-35/15N)
	Single level
	2

UL 94	PA I V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)		1000
(A)		57
(III/3)(V)		1000
(III/3)(KV)		8
(mm ²)		0.5
(mm ²)		16
(mm ²)		0.5
(mm ²)		10
(mm ²) , , ,		0.5
(mm ²) , , ,		10
(mm ²) , , ,		0.5
(mm ²) , , ,		10
² (mm ²) , , ,		1.5
² (mm ²) , , ,		4
Width)(mm)	(Blade thickness x	1.0x5.5
		18~20
		TS-35N、 TS-35/15N
		NO
		NO

-UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		55
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		55
UL/CUL	AWG	20
UL/CUL	AWG	6
UL/CUL	AWG	20
UL/CUL	AWG	6

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

