
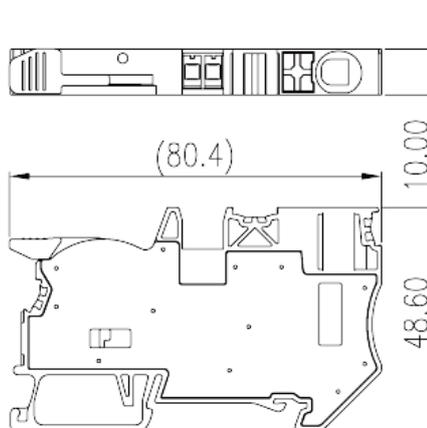


DPH10-DP

DIN

>

:2026-05-14

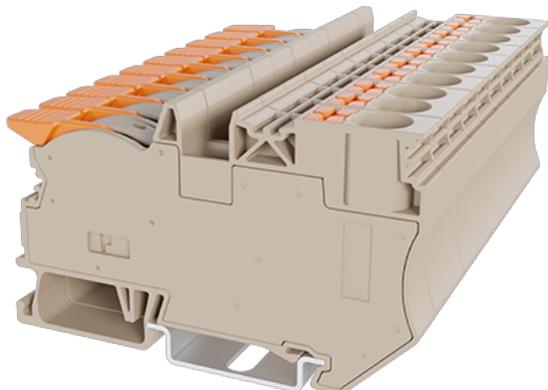

600V, 55A, Beige (default)

	Single Level Feed-through Terminal Block, Push-in Design
	Single Level Feed-through Terminal Block
	Refer to drawing
	Push-in Design
(mm)	80.4
(mm)	10
(mm)	50.1 (TS-35N) / 57.6 (TS-35/15N)
()	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)	1000
(A)	57
(III/3)(V)	1000
(III/3)(KV)	8
(mm ²)	0.5
(mm ²)	16
(mm ²)	0.5
(mm ²)	10
(mm ²) , ,	0.5
(mm ²) , ,	10
(mm ²) , ,	0.5
(mm ²) , ,	10
² (mm ²) , ,	1.5
² (mm ²) , ,	4
Width)(mm) (Blade thickness x	1x5.5
	18~20
	TS-35N、TS-35/15N
	NO
	NO

-UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	55
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	55
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	5
UL/CUL AWG	20
UL/CUL AWG	6
UL/CUL AWG	20
UL/CUL AWG	6



&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	20~6
(Group B)(V)	600
(Group B)(A)	55
(Group C)(AWG)	20~6
(Group C)(V)	600
(Group C)(A)	55
(Group D)(AWG)	20~6
(Group D)(V)	600
(Group D)(A)	5

CUL

(Group B)(AWG)	20~6
(Group B)(V)	600
(Group B)(A)	55
(Group C)(AWG)	20~6
(Group C)(V)	600
(Group C)(A)	55
(Group D)(AWG)	20~6
(Group D)(V)	600
(Group D)(A)	5

--	--

