
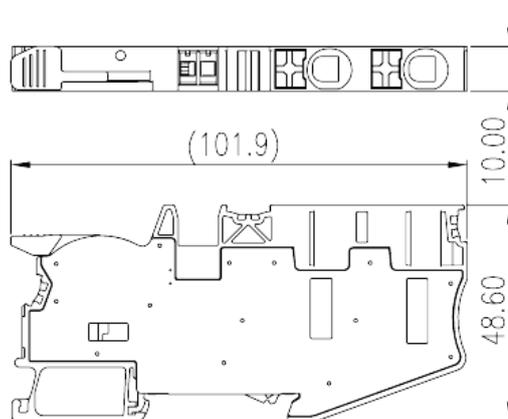


DPH10-DP-TN-PE

DIN

>

:2026-05-14

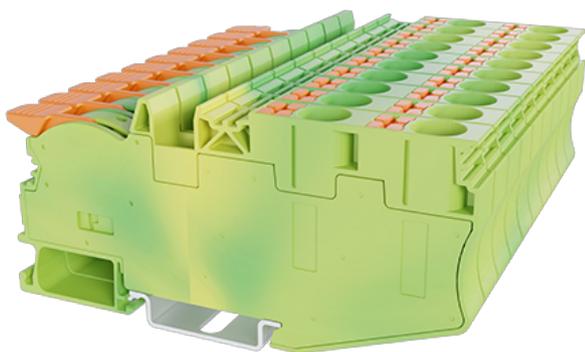

600V, Yellow-Green (default)

| | |
|-------|--|
| | Grounding Terminal Block, Push-in Design |
| | Grounding Terminal Block |
| | Refer to drawing |
| | Push-in Design |
| | Rail Mounting |
| (mm) | 101.9 |
| (mm) | 10 |
| (mm) | 50.1 (TS-35N) / 57.6 (TS-35/15N) |
| () | 1P |
| | Single level |
| | 3 |
| | PA |
| | I |
| UL 94 | V0 |



500M at DC 500V

-IEC

| | |
|--|------------------|
| (V) | 1000 |
| (III/3)(V) | 1000 |
| (III/3)(KV) | 8 |
| (mm ²) | 0.5 |
| (mm ²) | 16 |
| (mm ²) | 0.5 |
| (mm ²) | 10 |
| (mm ²) , , | 0.5 |
| (mm ²) , , | 10 |
| (mm ²) , , | 0.5 |
| (mm ²) , , | 10 |
| ² (mm ²) , , | 1.5 |
| ² (mm ²) , , | 4 |
| Width)(mm) (Blade thickness x | 1x5.5 |
| | 18~20 |
| | TS-35N、TS-35/15N |
| | NO |
| | YES |

-UL

| | |
|---------------------|-----|
| (UL/CUL Group B)(V) | 600 |
| (UL/CUL Group C)(V) | 600 |
| (UL/CUL Group D)(V) | 600 |
| UL/CUL AWG | 20 |
| UL/CUL AWG | 6 |
| UL/CUL AWG | 20 |
| UL/CUL AWG | 6 |

&

| | |
|---------------|-----|
| (YES or NO) | YES |
| 가 (YES or NO) | YES |
| | 120 |
| | -40 |

UL

| | |
|----------------|------|
| (Group B)(AWG) | 20~6 |
| (Group B)(V) | 600 |
| (Group C)(AWG) | 20~6 |
| (Group C)(V) | 600 |
| (Group D)(AWG) | 20~6 |
| (Group D)(V) | 600 |

CUL

| | |
|----------------|------|
| (Group B)(AWG) | 20~6 |
| (Group B)(V) | 600 |
| (Group C)(AWG) | 20~6 |
| (Group C)(V) | 600 |
| (Group D)(AWG) | 20~6 |
| (Group D)(V) | 600 |

