
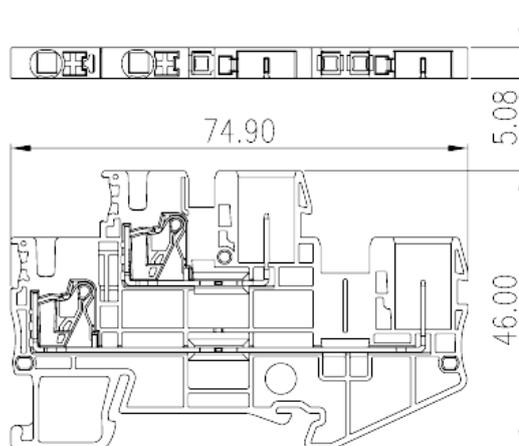


# DPPE2.5

DIN

>

:2026-05-14

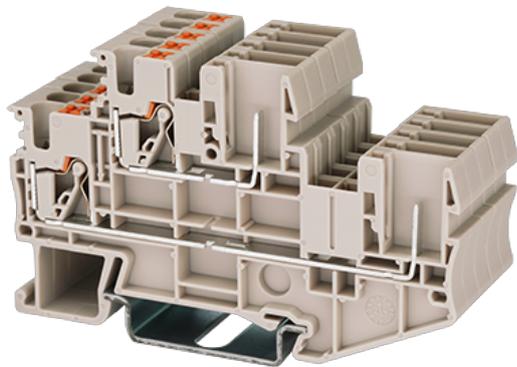

300V, 20A, Beige (default)

	Plug-in Connection Terminal Block, Push-in Design
	Plug-in Connection Terminal Block
	Refer to drawing
	Push-in Design
(mm)	74.9
(mm)	5.08
(mm)	47.5(TS-35N),55(TS-35/15N)
( )	2P
	Double level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC



(V)	500
(A)	24
(III/3)(V)	500
(III/3)(KV)	6
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
Width)(mm) (Blade thickness x	0.6x3.5
	10
	TS-35N、TS-35/15N
	YES
	NO

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	20
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	20
UL/CUL AWG	26
UL/CUL AWG	12
UL/CUL AWG	26
UL/CUL AWG	12

**&**

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

### UL

(Group B)(AWG)	26~12
(Group B)(V)	300
(Group B)(A)	12
(Group C)(AWG)	26~12
(Group C)(V)	300
(Group C)(A)	12

### CUL

(Group B)(AWG)	26~12
(Group B)(V)	300
(Group B)(A)	12
(Group C)(AWG)	26~12
(Group C)(V)	300
(Group C)(A)	12

