
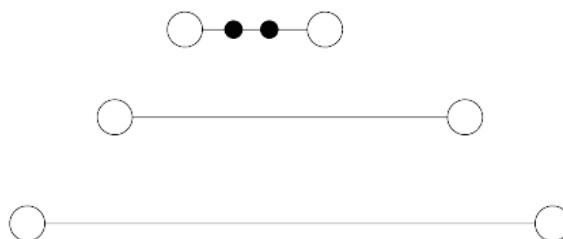


# DK2.5LU-3L

DIN

>

:2026-07-05

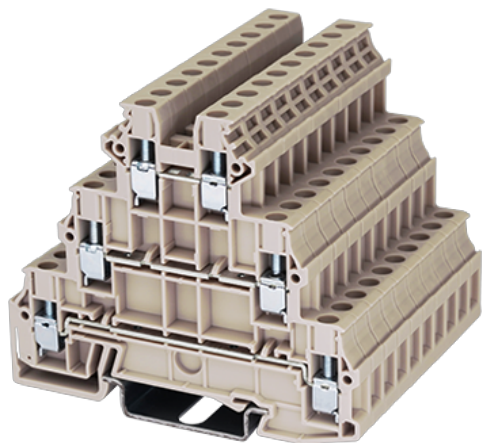

M2.5, 300V, 20A, Beige (default)

	Three level Feed-Through Terminal Block
	Three level Feed-Through Terminal Block
	Beige (default)
	Screw Connection
	Rail mounting
(mm)	72.8
(mm)	6.1
(mm)	62.7
( )	1P
	Three level
	6
	PA
	I
UL 94	V0
	500M at DC 500V
	Tin PLATED

## -IEC

(V)		1000
(A)		24
(III/3)(V)		1000
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		4
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> )	,	0.5
(mm <sup>2</sup> )	,	2.5
(mm <sup>2</sup> )	,	0.5
(mm <sup>2</sup> )	,	2.5
2	(mm <sup>2</sup> )	0.34
2	(mm <sup>2</sup> )	1.5
2	(mm <sup>2</sup> )	0.5
2	(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> ) 2	,	0.5
(mm <sup>2</sup> ) 2	,	1.5
2	(mm <sup>2</sup> )	0.5
2	(mm <sup>2</sup> )	1.5
		M2.5
Width)(mm)	(Blade thickness x	0.6x3.5
Philips		PH1
(N.m)		0.4
(N.m)		0.5
		9~11
		TS-35N/TS-35/15N


	YES
	NO

**-UL**

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		20
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12

**&**

(YES or NO)		YES
가 (YES or NO)		YES
		120
		-40

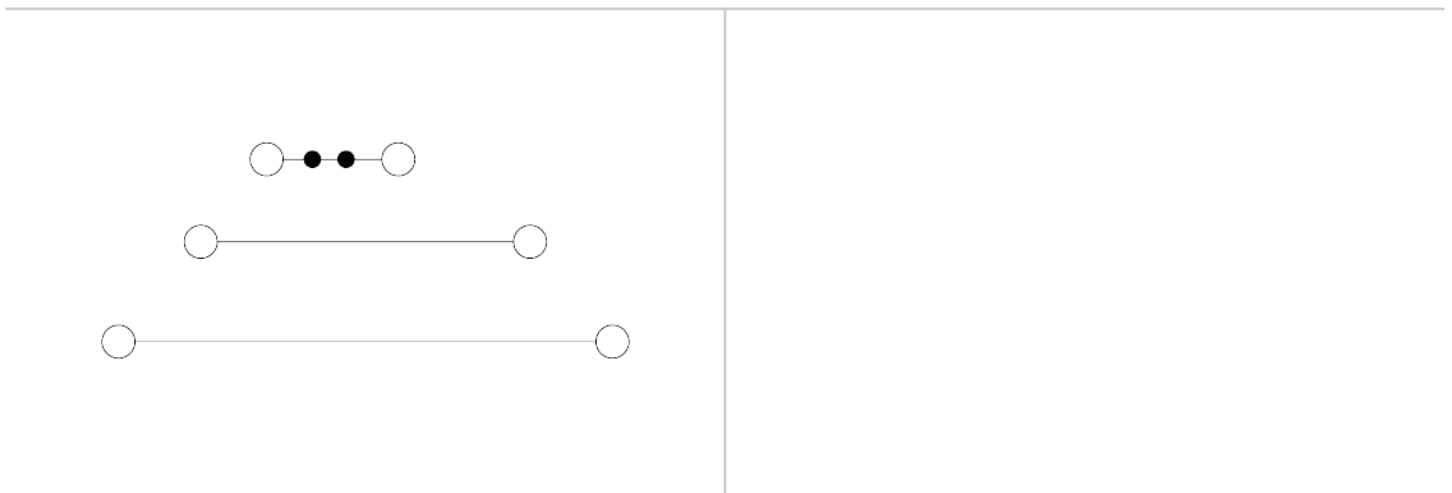



Delight Through Connections

