
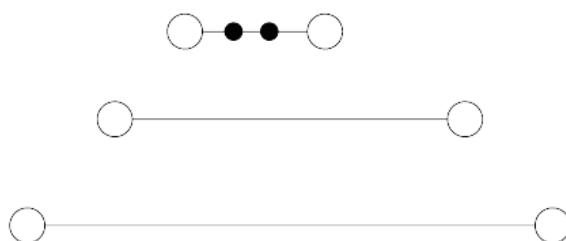


DK2.5LU-3L

DIN

>

:2026-02-10

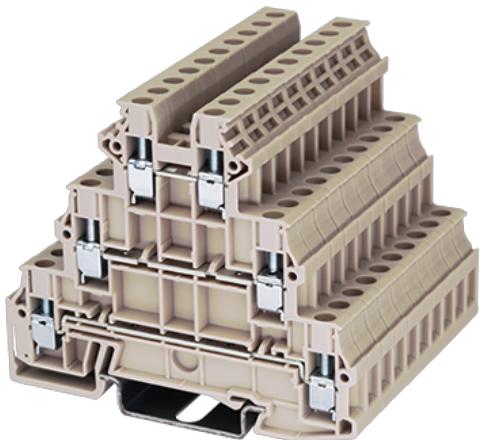

M2.5, 300V, 20A, Beige (default)

	Three level Feed-Through Terminal Block
	Three level Feed-Through Terminal Block
	Beige (default)
	Screw Connection
	Rail mounting
(mm)	72.8
(mm)	6.1
(mm)	62.7
()	1P
	Three level
	6

UL 94	PA I V0
	500M at DC 500V Tin PLATED

**-IEC**

(V)		1000
(A)		24
(III/3)(V)		1000
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm ²)		0.34
(mm ²)		4
(mm ²)		0.34
(mm ²)		2.5
(mm ²) , ,		0.5
(mm ²) , ,		2.5
(mm ²) , ,		0.5
(mm ²) , ,		2.5
2 (mm ²)		0.34
2 (mm ²)		1.5
2 (mm ²)		0.5
2 (mm ²)		1.5
2 (mm ²) , , ,		0.5
2 (mm ²) , , ,		1.5
2 (mm ²) , , ,		0.5
2 (mm ²) , , ,		1.5
Width)(mm)	(Blade thickness x	0.6x3.5
Philips		PH1
(N.m)		0.4
(N.m)		0.5
		9~11
		TS-35N/TS-35/15N


	YES
	NO

-UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	20
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	20
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	5
UL/CUL	AWG 22
UL/CUL	AWG 12
UL/CUL	AWG 22
UL/CUL	AWG 12

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

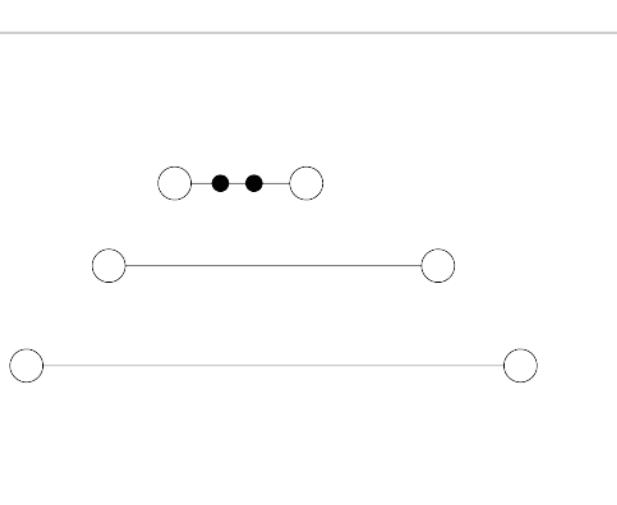



Delight Through Connections

CE

