


DKES1.5N2

DIN

>

:2026-07-05

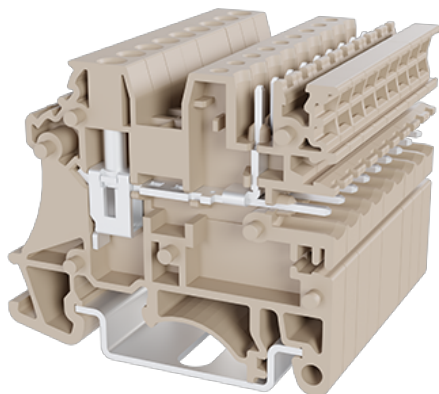

M3, 300V, 20A, Beige (default)

	Plug-in Connection Terminal Block , Screw Connection
	Plug-in Connection Terminal Block , Screw Connection
	Beige (default)
	Screw Connection
	Rail mounting
(mm)	50.6
(mm)	5.08
(mm)	42.5
()	1P
	Single level
	3
	PA
	I
UL 94	V0
	500M at DC 500V



Tin PLATED

-IEC

(V)	250
(A)	24
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.5
(mm ²)	2.5
(mm ²)	0.5
(mm ²)	2.5
(mm ²) , ,	0.5
(mm ²) , ,	2.5
(mm ²) , ,	0.5
(mm ²) , ,	2.5
2 (mm ²)	0.5
2 (mm ²)	1.5
2 (mm ²)	0.5
2 (mm ²)	1.5
(mm ²) ² , ,	0.5
(mm ²) ² , ,	1.5
(mm ²) ² , ,	0.5
(mm ²) ² , ,	1.5
(Blade thickness x Width)(mm)	M3 0.6x3.5
(N.m)	0.5
(N.m)	0.6
	9~10


	TS-35N/TS-35/15N
	YES
	NO

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		20
UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12

&

(YES or NO)		YES
가 (YES or NO)		YES
		120
		-40

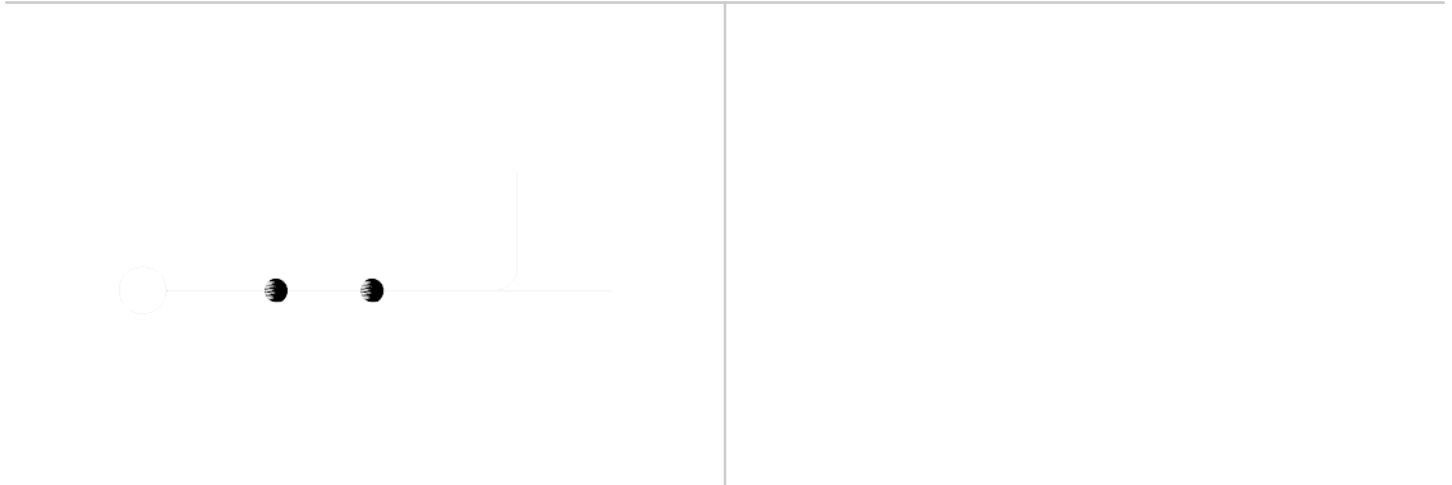



Delight Through Connections

