
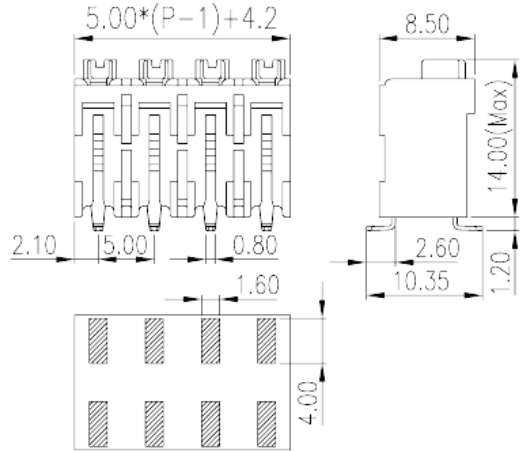


0188-12XXSMDW R

PCB > PCB

:2026-07-05

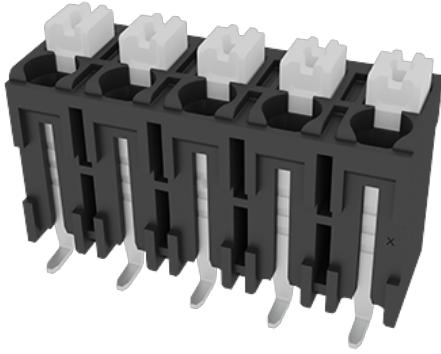

Pitch :5.00mm, 300V, 10A

PCB Terminal Blocks, Push-in Design	
PCB Terminal Blocks	
(mm)	5
	Black (default)
	Push-in Design
	Without
	Reflow Soldering
(mm)	$5.00 \times (P-1) + 4.2$
(mm)	10.35
(mm)	14
(x) (mm)	0.35x0.8
()	02P~08P
	Single level
	2~8



	HIGH-TEMPERATURE PLASTICS
	IIIa
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	320
(A)	13.5
(II/2)(V)	400
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	1.5
(mm ²)	0.2
(mm ²)	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1
(mm ²) , ,	0.25
(mm ²) , ,	1
Width)(mm) (Blade thickness x	0.8X4
	8~9

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	10
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10

UL/CUL	AWG	28
UL/CUL	AWG	16
UL/CUL	AWG	28
UL/CUL	AWG	16

&

가	(YES or NO)	YES
		120
		-40

