


0153-91XX

PCB > PCB

:2026-05-14

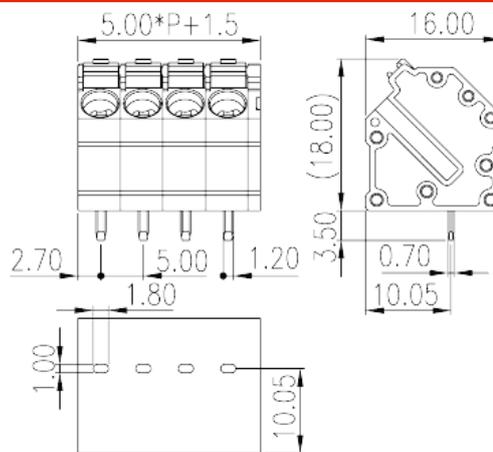

Pitch :5.00mm, 300V, 20A

PCB Terminal Blocks, Push-in Design	
PCB Terminal Blocks	
(mm)	5
	Black (default)
	Push-in Design
	Without
	Wave Soldering
(mm)	$5.00 \times P + 1.5$
(mm)	16
(mm)	18
(x) (mm)	0.7x12
PCB (mm)	1x1.8
()	02~24P
	Single level
	2~24
	PA



	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	320
(A)	24
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	2.5
(mm ²)	0.2
(mm ²)	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
² (mm ²) , ,	0.75
² (mm ²) , ,	1.5
Width)(mm) (Blade thickness x	0.6x3.5
	12~14

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	20

(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	24
UL/CUL	AWG	12
UL/CUL	AWG	24
UL/CUL	AWG	12

&

가	(YES or NO)	YES
		120
		-40

