


0290-43XX

PCB > PCB

:2026-02-11

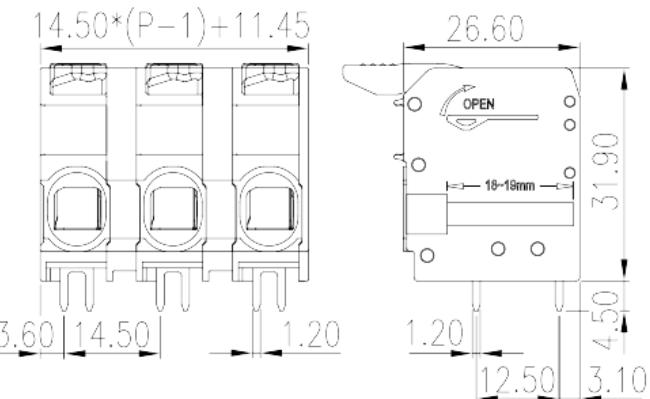

Pitch :14.50mm, 1000V, 66A

	PCB Terminal Blocks, Push-in Design
	PCB Terminal Blocks
(mm)	14.5
	Black (default)
	Push-in Design
	Without
	Wave Soldering
(mm)	14.50*(P-1)+11.45
(mm)	26.6
(mm)	31.9
(x) (mm)	1.2x1.2
PCB (mm)	1.7~1.9
()	02P~12P
	Single level
	2~12

PA

	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	1000
(A)	76
(II/2)(V)	1000
(III/2)(V)	1000
(III/3)(V)	1000
(II/2)(KV)	8
(III/2)(KV)	8
(III/3)(KV)	8
(mm ²)	0.75
(mm ²)	16
(mm ²)	0.75
(mm ²)	16
(mm ²), , ,	0.75
(mm ²), , ,	16
(mm ²), , ,	0.75
(mm ²), , ,	10
2 (mm ²), , ,	0.75
2 (mm ²), , ,	6
	18~19

-UL

(UL/CUL Group B)(V)	1000
(UL/CUL Group B)(A)	66
(UL/CUL Group E)(V)	1000
(UL/CUL Group E)(A)	66

UL/CUL	AWG	18
UL/CUL	AWG	4
UL/CUL	AWG	18
UL/CUL	AWG	4

&




가	(YES or NO)	YES
		120
		-40

UL

(Group E)(AWG)	18~4
(Group E)(V)	1000
(Group E)(A)	66

CUL

(Group C)(AWG)	18~4
(Group C)(V)	100
(Group C)(A)	66

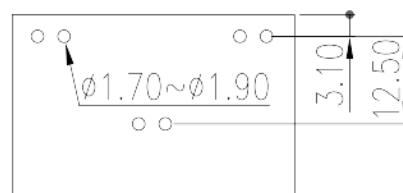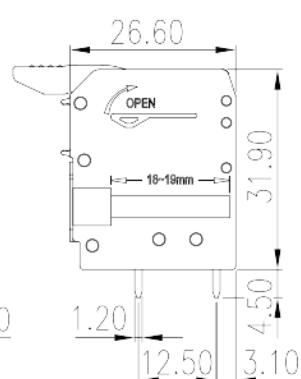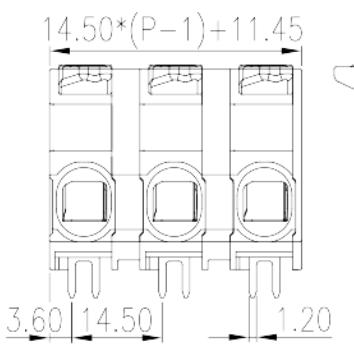



Delight Through Connections

