


EEHK2V-XXP

PCB > PCB

:2026-05-14

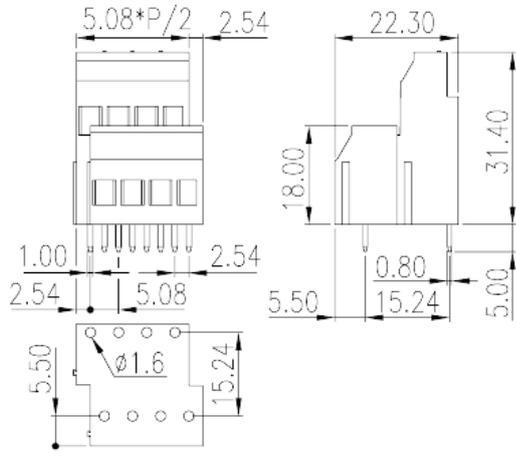

Pitch :5.08mm, M2.5, 300V, 25A

PCB Terminal Blocks, Screw Connection



	PCB Terminal Blocks
(mm)	5.08
	Green (default)
	Screw Connection
	Without
	Wave Soldering
(mm)	5.08*P/2
(mm)	22.3
(mm)	31.4
(x) (mm)	0.8x1
PCB (mm)	1.6
()	04P~48P
	Double level
	4~48

	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	400
(A)	24
(II/2)(V)	630
(III/2)(V)	400
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	4
(mm ²)	0.2

	(mm ²)		4
(mm ²)	,	,	0.25
(mm ²)	,	,	2.5
(mm ²)	,	,	0.25
(mm ²)	,	,	2.5
	2	(mm ²)	0.2
	2	(mm ²)	1.5
	2	(mm ²)	0.2
	2	(mm ²)	1.5
(mm ²)	2	,	0.25
(mm ²)	2	,	0.75
	2	(mm ²)	0.5
	2	(mm ²)	1.5
			M2.5
Width)(mm)	(Blade thickness x		0.6x3.5
Philips			PH1
	(N.m)		0.4
	(N.m)		0.5
			6~7

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		25(FW1) & 20(FW2)
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	24
UL/CUL	AWG	12
UL/CUL	AWG	24
UL/CUL	AWG	12

&

가	(YES or NO)	YES
		120
		-40

UL

(Group B) (AWG)	24~12
(Group B) (V)	300
(Group B) (A)	25(FW1) & 20(FW2)
(Group D) (AWG)	24~12
(Group D) (V)	300
(Group D) (A)	10

CUL

(Group B) (AWG)	24~12
(Group B) (V)	300
(Group B) (A)	25(FW1) & 20(FW2)
(Group D) (AWG)	24~12
(Group D) (V)	300
(Group D) (A)	10

