
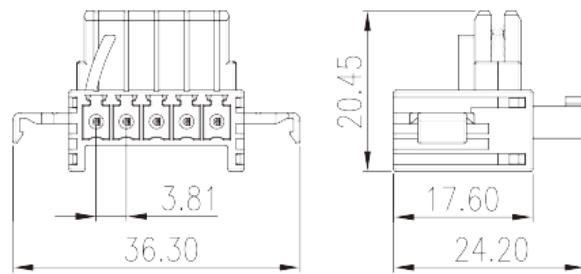


BST-111-05

PCB > PCB

:2026-02-11

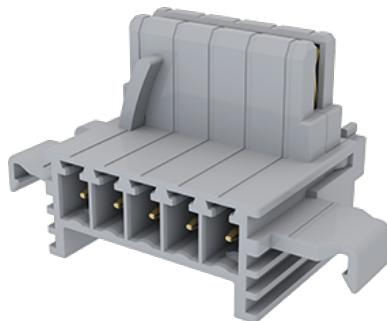

Pitch :3.81mm, 150V AC/DC, 8A

(mm)	Rail Connector
(mm)	Rail connector
(mm)	3.81
(mm)	Grey (default)
(mm)	With lock flange
(mm)	36.3
(mm)	24.2
(mm)	20.45
()	05P
	Single level
	5

UL 94	PA
	I
	V0
	500M at DC 500V
	COPPER ALLOY

Au PLATED

-IEC

(V)	320
(A)	12
(II/2)(V)	320
(III/2)(V)	160
(III/3)(V)	160
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5

-UL

(UL/CUL Group B)(V)	150
(UL/CUL Group B)(A)	8

&

가	(YES or NO)	YES
		120
		-40

UL

(Group B)(V)	150
(Group B)(A)	8

CUL

(Group B)(V)	150
(Group B)(A)	6

