


0185-13XX

PCB > PCB

:2026-07-05

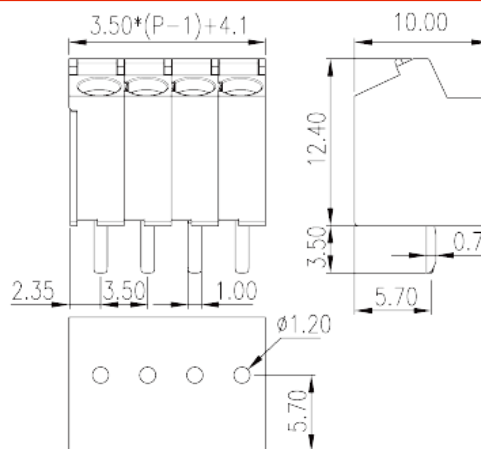

Pitch :3.50mm, 300V, 10A

		PCB Terminal Blocks, Push-in Design
		PCB Terminal Blocks
(mm)		3.5
		Black (default)
		Push-in Design
		Without
		Wave Soldering
(mm)		$3.50*(P-1)+4.1$
(mm)		10
(mm)		12.4
() x () (mm)		0.6x1
PCB (mm)		1.2
()		02P~24P
		Single level
		2~24
		PA



	I
UL 94	V0
	500M at DC 500V
	HIGH PERFORMANCE COPPER ALLOY
	Tin PLATED

-IEC

(V)	200
(A)	14
(II/2)(V)	400
(III/2)(V)	200
(III/3)(V)	160
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5
(mm ²)	0.2
(mm ²)	1.5
(mm ²)	0.2
(mm ²)	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1
(mm ²) , ,	0.25
(mm ²) , ,	0.75
Width)(mm) (Blade thickness x	0.4x2.5
	8~9

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	10
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	26

UL/CUL	AWG	16
&		
가	(YES or NO)	YES
		120
		-40

