


0185-13XX

PCB > PCB

:2026-05-14

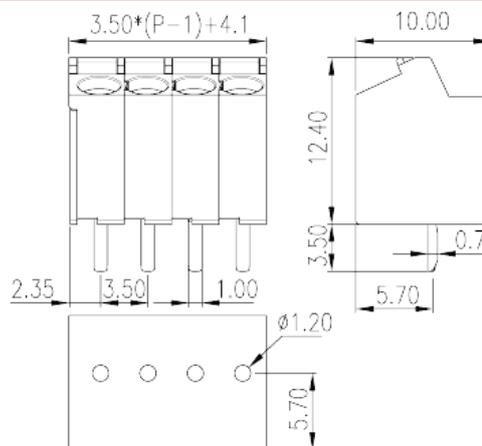

Pitch :3.50mm, 300V, 10A

PCB Terminal Blocks, Push-in Design	
PCB Terminal Blocks	
(mm)	3.5
	Black (default)
	Push-in Design
	Without
	Wave Soldering
(mm)	$3.50 \times (P-1) + 4.1$
(mm)	10
(mm)	12.4
(x) (mm)	0.6x1
PCB (mm)	1.2
()	02P~24P
	Single level
	2~24
	PA



	I
UL 94	V0
	500M at DC 500V
	HIGH PERFORMANCE COPPER ALLOY
	Tin PLATED

-IEC

(V)	200
(A)	14
(II/2)(V)	400
(III/2)(V)	200
(III/3)(V)	160
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5
(mm ²)	0.2
(mm ²)	1.5
(mm ²)	0.2
(mm ²)	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1
(mm ²) , ,	0.25
(mm ²) , ,	0.75
Width)(mm) (Blade thickness x	0.4x2.5
	8~9

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	10
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	26

UL/CUL	AWG	16
&		
가	(YES or NO)	YES
		120
		-40

