


# 0254-20XX

PCB > PCB -

:2026-07-06

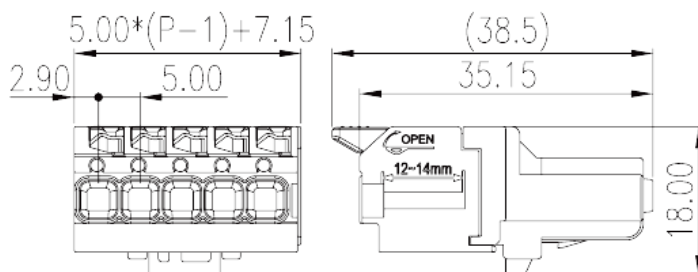

Pitch :5.00mm, 300V, 15.5A

	PCB Connector-Plug, Push-in Design
	PCB Connector – Plug
(mm)	5
	Black (default)
	Push-in Design
	With lock flange
(mm)	$5.00*(P-1) + 7.15$
(mm)	18
(mm)	38.5
( )	02P~14P
	Single level
	02~14
	PA
	a
UL 94	V0
	1000M at DC 500V



	COPPER ALLOY
	Au PLATED

**-IEC**

(V)	320
(A)	18
(II/2)(V)	320
(III/2)(V)	320
(III/3)(V)	200
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.5
(mm <sup>2</sup> ) , ,	1.5
(mm <sup>2</sup> ) , ,	0.5
(mm <sup>2</sup> ) , ,	1.5
	12~14

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15.5
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	28
UL/CUL AWG	12
UL/CUL AWG	28
UL/CUL AWG	12

**&**

가	(YES or NO)	YES
		120
		-40

## UL

(Group B)(AWG)	28~12
(Group B)(V)	300
(Group B)(A)	15.5
(Group D)(AWG)	28~12
(Group D)(V)	300
(Group D)(A)	10

## CUL

(Group B)(AWG)	28~12
(Group B)(V)	300
(Group B)(A)	15.5
(Group D)(AWG)	28~12
(Group D)(V)	300
(Group D)(A)	10

