


0254-30XX

PCB > PCB -

:2026-07-06

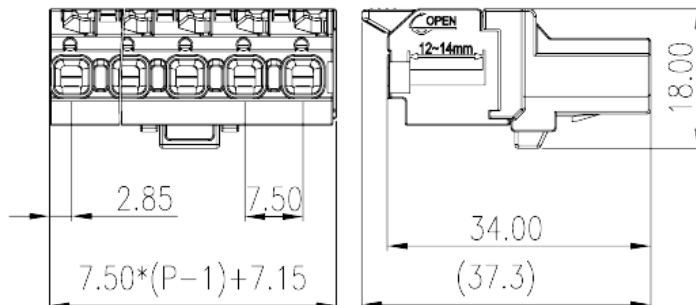

Pitch :7.50mm, 300V, 16A

	PCB Connector-Plug, Push-in Design
	PCB Connector – Plug
(mm)	7.5
	Black (default)
	Push-in Design
	With lock flange
(mm)	$7.50*(P-1)+7.15$
(mm)	18
(mm)	37.3
()	02P~12P
	Single level
	2~12
	PA
	a
UL 94	V0
	1000M at DC 500V



		COPPER ALLOY
		Au PLATED
-IEC		
(V)		1000
(A)		18
(II/2)(V)		1000
(III/2)(V)		630
(III/3)(V)		500
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm ²)		0.2
(mm ²)		2.5
(mm ²)		0.2
(mm ²)		2.5
(mm ²)	' ,	0.5
(mm ²)	' ,	1.5
(mm ²)	' ,	0.5
(mm ²)	' ,	1.5
		12~14
-UL		
(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		16
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		16
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	28
UL/CUL	AWG	12
UL/CUL	AWG	28
UL/CUL	AWG	12



&

가 (YES or NO)	YES
	120
	-40

UL

(Group B) (AWG)	28~12
(Group B) (V)	300
(Group B) (A)	16
(Group C) (AWG)	28~12
(Group C) (V)	300
(Group C) (A)	16
(Group D) (AWG)	28~12
(Group D) (V)	600
(Group D) (A)	5

CUL

(Group B) (AWG)	28~12
(Group B) (V)	300
(Group B) (A)	16
(Group C) (AWG)	28~12
(Group C) (V)	300
(Group C) (A)	16
(Group D) (AWG)	28~12
(Group D) (V)	600
(Group D) (A)	5

--	--

