


2ESDVS-XXP

PCB > PCB -

:2026-07-06

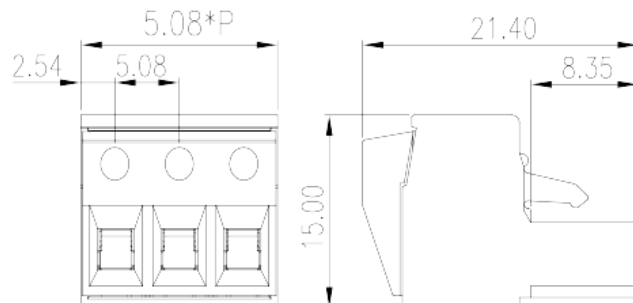

Pitch :5.08mm, M2.5, 300V, 15A

	PCB Connector-Plug, Screw Connection
	PCB Connector – Plug
(mm)	5.08
	Green (default)
	Screw Connection
	Without
(mm)	15.24
(mm)	21.4
(mm)	15
()	03P
	Single level
	3
	PA
	I
UL 94	V0
	500M at DC 500V



		COPPER ALLOY
		Tin PLATED
-IEC		
(V)		630
(A)		18
(II/2)(V)		630
(III/2)(V)		320
(III/3)(V)		320
(II/2)(KV)		4
(III/2)(KV)		4
(III/3)(KV)		4
(mm ²)		0.2
(mm ²)		4
(mm ²)		.2
(mm ²)		2.5
(mm ²)	' ,	0.2
(mm ²)	' ,	2.5
(mm ²)	' ,	0.25
(mm ²)	' ,	2.5
2	(mm ²)	0.2
2	(mm ²)	1
2	(mm ²)	0.2
2	(mm ²)	1.5
(mm ²)	2 ' ,	0.25
(mm ²)	2 ' ,	1
2	(mm ²) ' ,	0.5
2	(mm ²) ' ,	1.5
		M2.5
Width)(mm)	(Blade thickness x	0.6x3.5

(N.m)	0.4
(N.m)	0.6
	7~8

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	28
UL/CUL AWG	12
UL/CUL AWG	28
UL/CUL AWG	12

&

가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	28~12(sol) ; 30~12(str)
(Group B)(V)	300
(Group B)(A)	15
(Group D)(AWG)	28~12(sol) ; 30~12(str)
(Group D)(V)	300
(Group D)(A)	10

CUL

(Group B)(AWG)	28~12(sol) ; 30~12(str)
(Group B)(V)	300
(Group B)(A)	15
(Group D)(AWG)	28~12(sol) ; 30~12(str)
(Group D)(V)	300
(Group D)(A)	10

