


# ECH250R-XXPL

PCB > PCB -

:2026-07-06

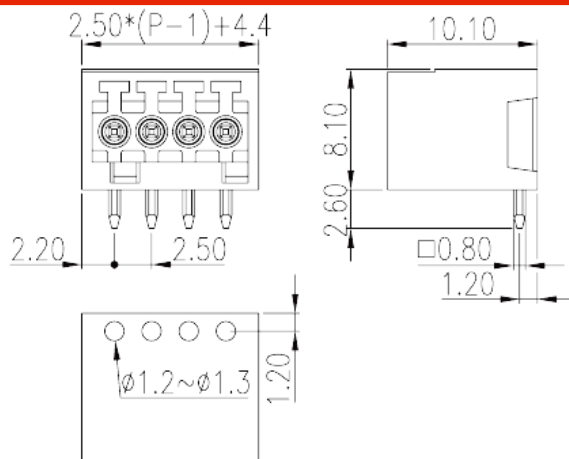

Pitch :2.50mm, 150V, 4A

	PCB Connector – Socket, Reflow Soldering
	PCB Connector – Socket
(mm)	2.5
	Black (default)
	Without
	Reflow Soldering (245 )
(mm)	$2.50 \times (P-1) + 4.4$
(mm)	10.1
(mm)	8.1
( x ) (mm)	0.8x0.8
PCB (mm)	1.3
( )	02P~24P
	Single level
	2~24
	HIGH-TEMPERATURE PLASTICS
	IIIa



UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED
MSL	1

**-IEC**

(V)	160
(A)	4
(II/2)(V)	160
(III/2)(V)	160
(III/3)(V)	32
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	1.5

**-UL**

(UL/CUL Group B)(V)	150
(UL/CUL Group B)(A)	4
(UL/CUL Group D)(V)	150
(UL/CUL Group D)(A)	4

**&**

가 (YES or NO)	YES
	120
	-40

**UL**

(Group B)(V)	150
(Group B)(A)	4
(Group D)(V)	150
(Group D)(A)	4

**CUL**

(Group B)(V)	150
--------------	-----

(Group B) (A)	4
(Group D) (V)	150
(Group D) (A)	4

