
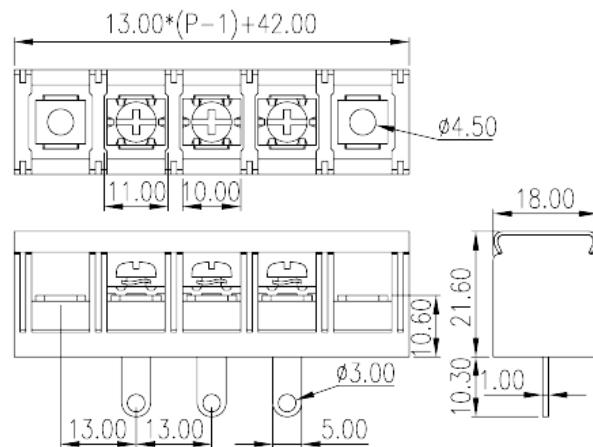


DT-7C-A02W-XX

>

:2025-12-25

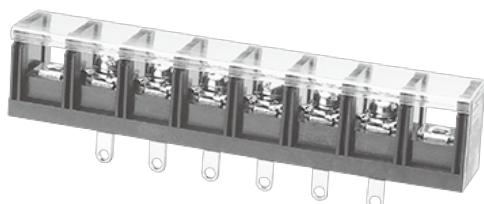

Pitch: 13.00mm, 300V, 40A

	Single Row, Screw Connection
(mm)	Single Row
(mm)	13
	Black (default)
	Screw connection&Iron Soldering
	With mounting flange
	Iron Soldering
(mm)	13.00*(P-1)+42
(mm)	18
(mm)	21
(x) (mm)	1x5
()	02P~12P
	Single Row
	2~12

	PBT
	IIIa



Delight Through Connections

UL 94

V0

1000M at DC 500V

COPPER ALLOY

Tin PLATED

-IEC

(V)		1000
(A)		41
(II/2)(V)		1000
(III/2)(V)		1000
(III/3)(V)		500
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm ²)		0.5
(mm ²)		6
(mm ²)		0.5
(mm ²)		6
2	(mm ²)	0.5
2	(mm ²)	6
2	(mm ²)	0.5
2	(mm ²)	6
Philips		M4
(N.m)		1x5.5
(N.m)		PH2
(N.m)		1.2
(N.m)		1.5
		10~11

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	40
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	40
(UL/CUL Group D)(V)	600



(UL/CUL Group D)(A)		5
UL/CUL	AWG	18
UL/CUL	AWG	8
UL/CUL	AWG	18
UL/CUL	AWG	8

&

(YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	18~8
(Group B)(V)	300
(Group B)(A)	40
(Group C)(AWG)	18~8
(Group C)(V)	300
(Group C)(A)	40
(Group D)(AWG)	18~8
(Group D)(V)	600
(Group D)(A)	5

CUL

(Group B)(AWG)	18~8
(Group B)(V)	300
(Group B)(A)	40
(Group C)(AWG)	18~8
(Group C)(V)	300
(Group C)(A)	40
(Group D)(AWG)	18~8
(Group D)(V)	600
(Group D)(A)	5

